

Heat Shrink Tubings

Black

Temperature ranges: -55°C~125°C.

Shrinking temperature 70°C

Shrunk totally at 110°C.


Longitudinal shrinking

- a) $\text{Ø}0.6\sim\text{Ø} 6.0$ less than $\pm 5\%$
- b) $\text{Ø} 6.0\sim\text{Ø} 30.0$ less than $\pm 8\%$
- c) $\text{Ø}30.0\sim\text{Ø} 50.0$ less than $\pm 10\%$
- d) $\text{Ø}60.0$ less than $\pm 15\%$

Heat Resistance:

250°Cx4hr No Cracking.

Standard for Extruded Electrical
Tubing UL 224.

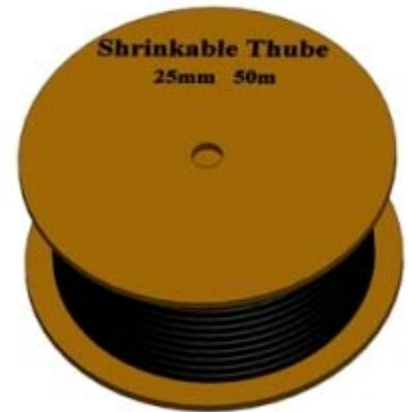

Kiryat Sharet, Holon P.o.Box 5528

Phone: +972 3 5596755

Mail: scr_ltd@bezeqint.net

WEB: www.scr ltd.com