
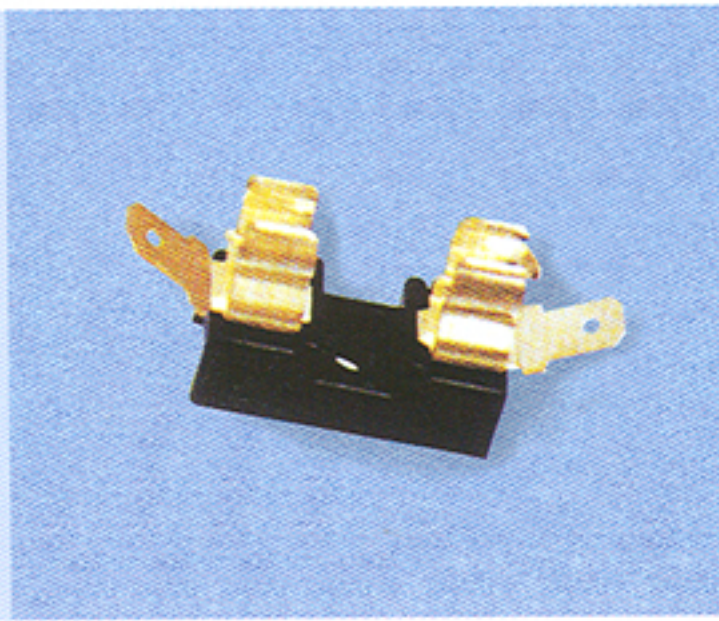


## S1071

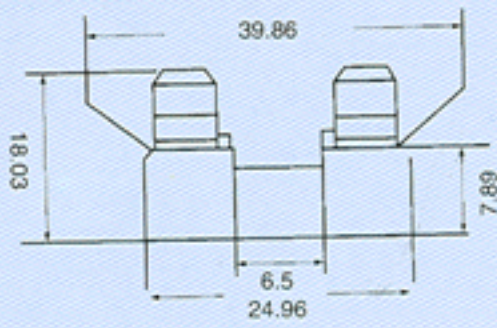

Explanaion of specification:  
suitable fuse  $\phi 5.25 \times 20 \text{ mm}$   
Maximum rated value: 6A 250V AC  
Holder: Flame-rated value: 6A 250V AC  
Holder: Flame-retard plastic  
Clip pole: Silver- plating brass