


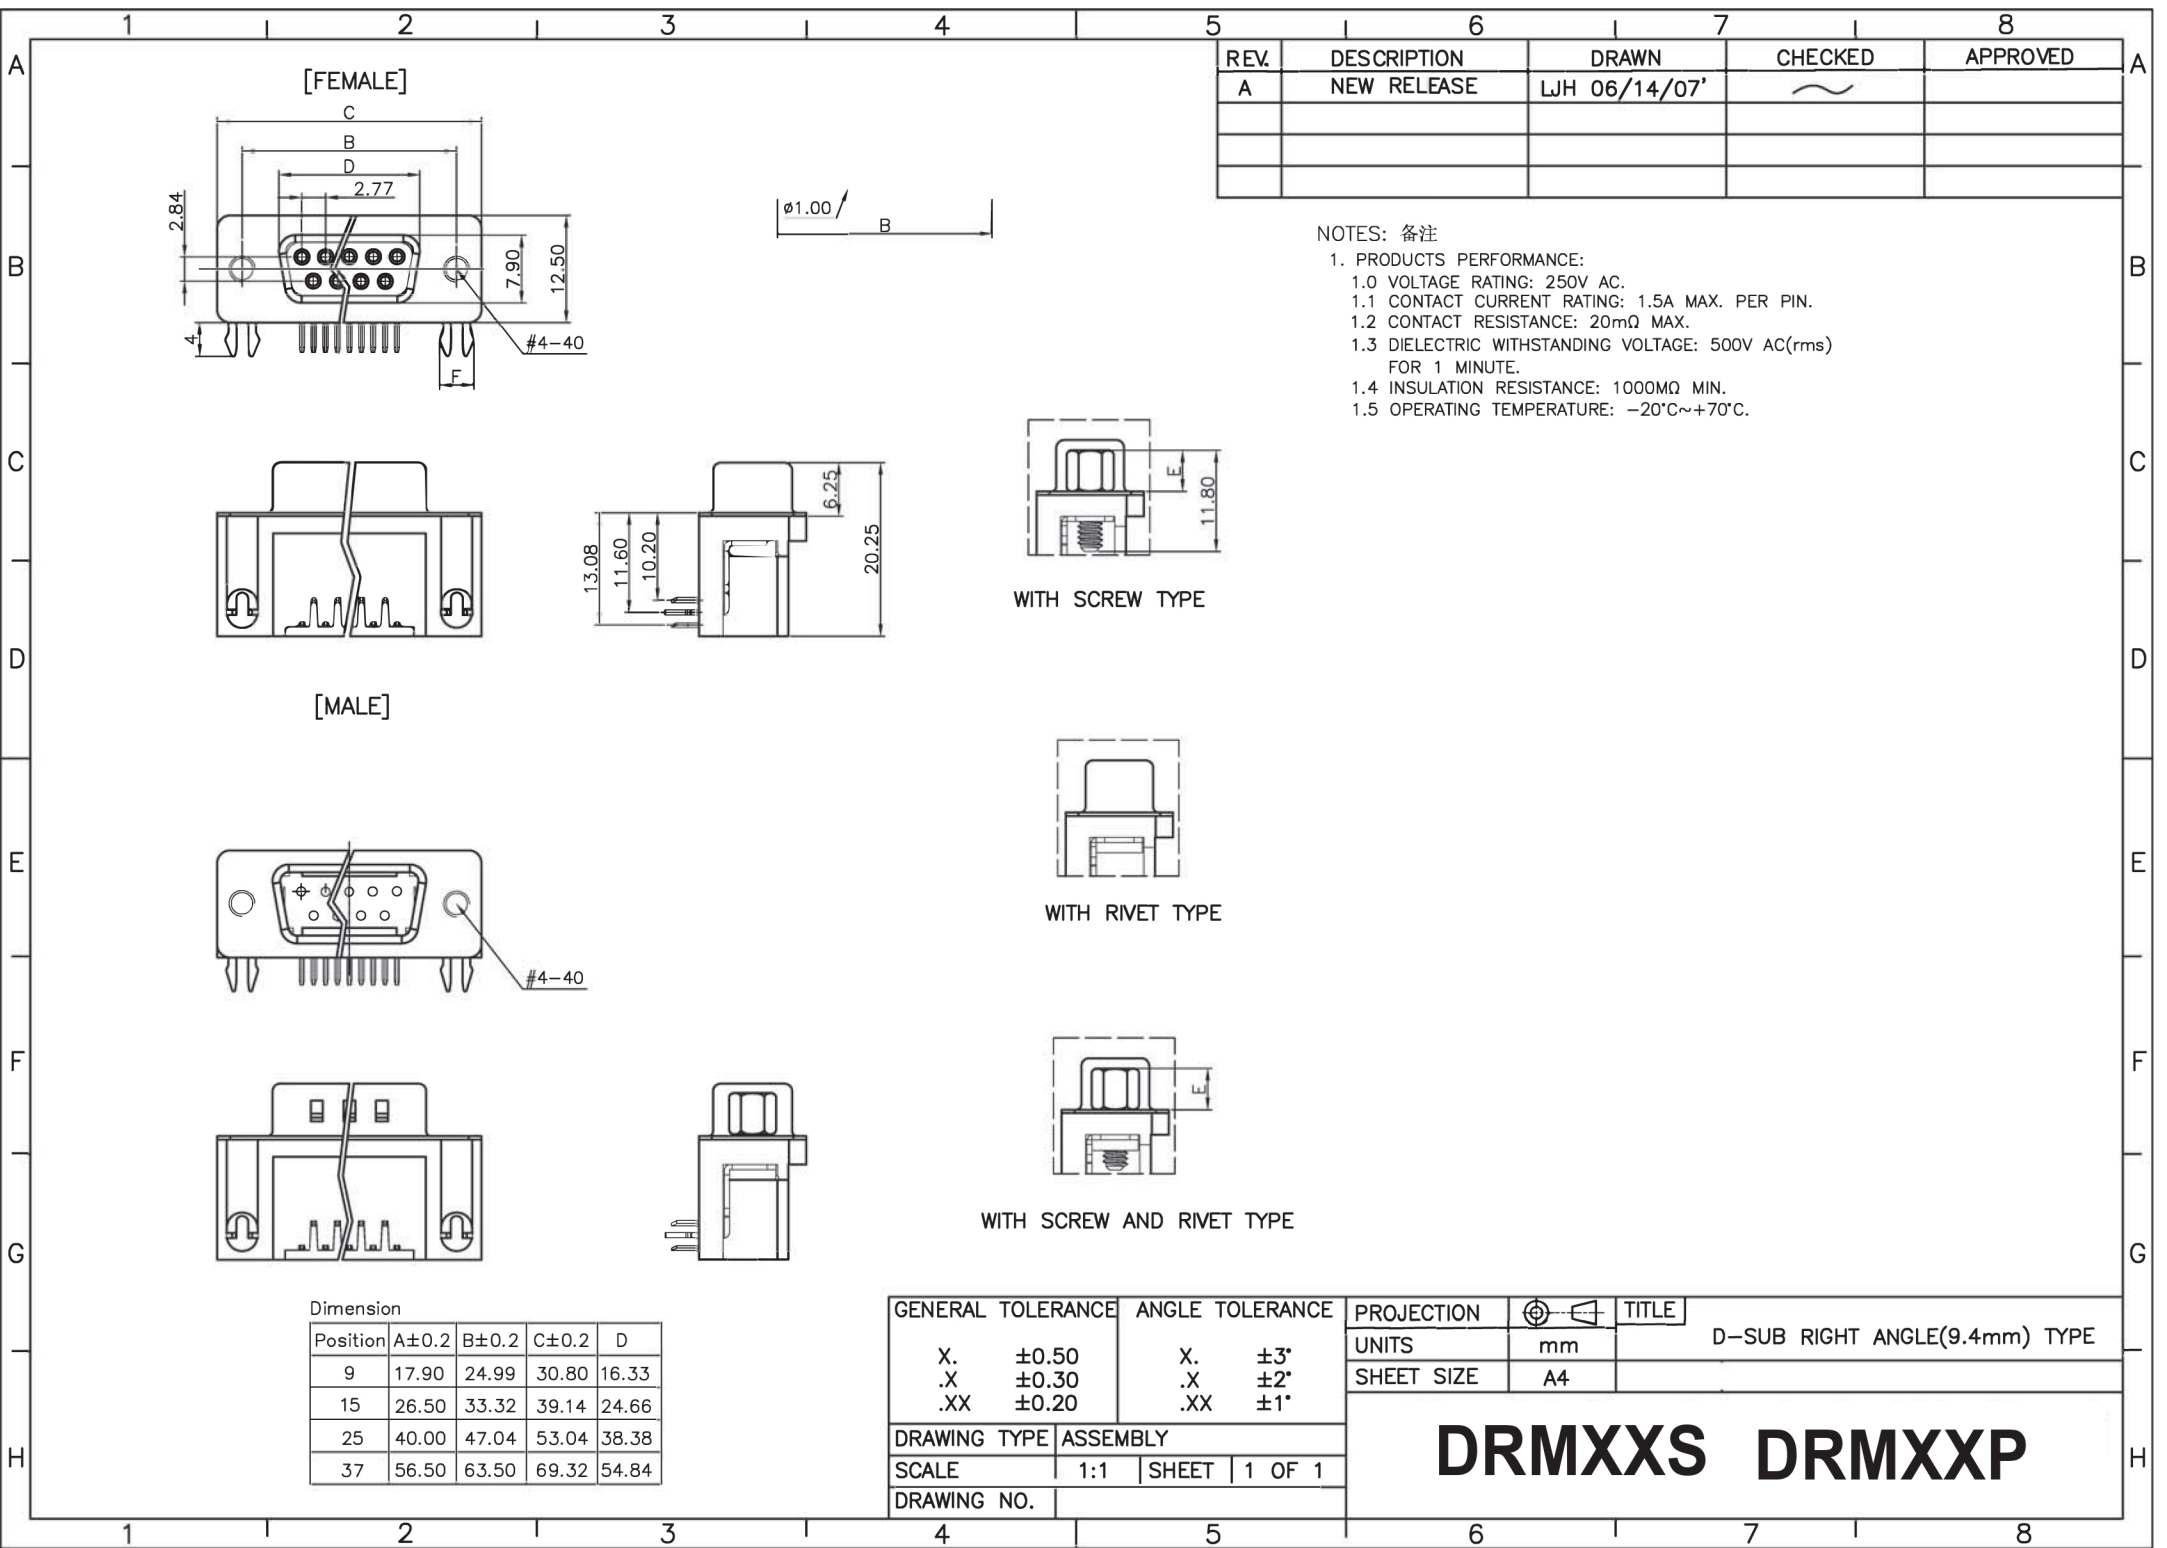

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/14/07'	~	

NOTES: 备注

1. PRODUCTS PERFORMANCE:

1.0 VOLTAGE RATING: 250V AC.

1.1 CONTACT CURRENT RATING: 1.5A MAX. PER PIN.

1.2 CONTACT RESISTANCE: 20mΩ MAX.

1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.

1.4 INSULATION RESISTANCE: 1000MΩ MIN.

1.5 OPERATING TEMPERATURE: -20°C~+70°C.

Dimension				
Position	A±0.2	B±0.2	C±0.2	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.50	X.	±3°	UNITS	mm	D—SUB RIGHT ANGLE(9.4mm) TYPE
.X	±0.30	.X	±2°	SHEET SIZE	A4	
.XX	±0.20	.XX	±1°			
DRAWING TYPE		ASSEMBLY		DRMXXS DRMXXP		
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.						