

SPECIFICATIONS

Current Rating:5 AMP

Dielectric Withstanding Voltage:

1000V Per Minute

Insulation Resistance:1000 Megohms Min.

At 500V DC

Contact Resistance:15 Milliohms Max.10 SES.





Operating Temperature:-55°C ~+105°C

Insulator:PBT+30% Glass Fiber

UL 94V-0,Black

Contact:Brass,Semi Gold Plated Over Nickel

Shell:Steel Nickel Plated

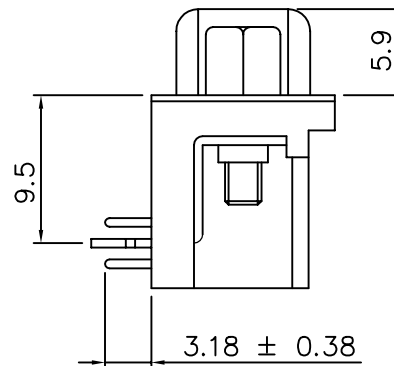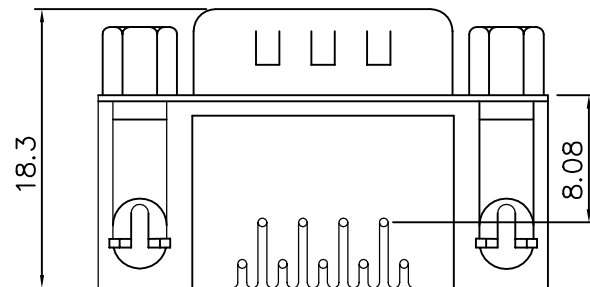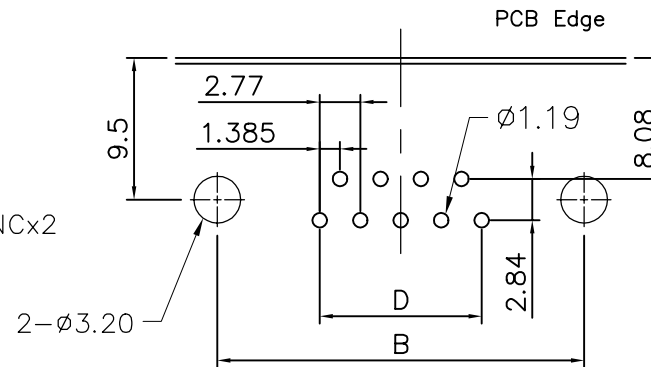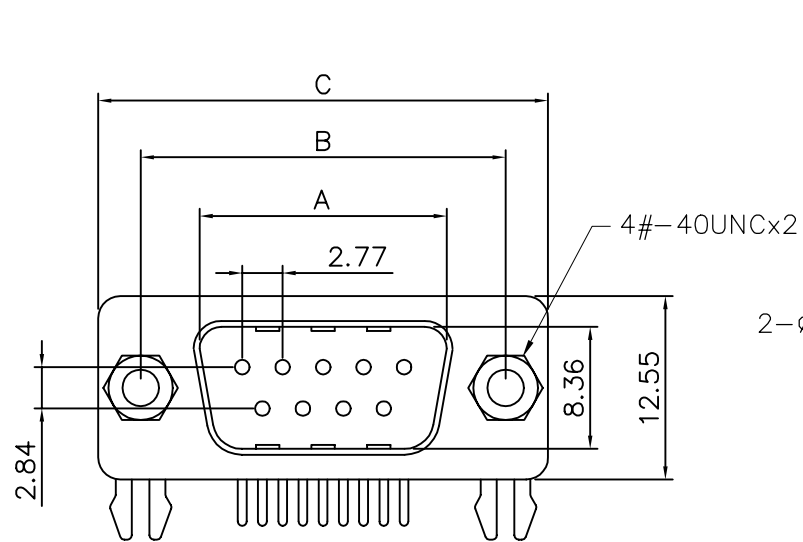

Position	A±0.20	B±0.25	C±0.38	D
9	16.92	24.99	30.80	11.08
15	25.25	33.32	39.10	19.39
25	38.96	47.04	53.00	33.24
37	55.42	63.50	69.32	49.86

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.CATEGORY
D-SUBAPPROVED BY
MEIUNLESS OTHERWISE
SPECIFIED
TOLERANCES AREPART No.
DRXXPCHECKED BY
RAN

.X ±0.25

DRAWING No.
DRXXPDRAWING BY
HZF

.XX ±0.15

.XXX ±0.05

SCALE
NONEREV.
AUNIT
mm

AREA

REVISIONS

CHK

DATE