


SPECIFICATIONS:

Current Rating: 1A
 Withstanding Voltage : AC 500V RMS
 Insulation Resistance: 1000 Megohms Min.
 At DC 500V
 Contact Resistance: 1500 Milliohms Max.
 Operating Temperature: -40°C To +105°C
 Contact: Phosphor Bronze or Brass
 Gold or Tin Over Nickel
 Insulator: P.B.T+30% Glass Fiber
 UL 94V-0
 Packing: Tray

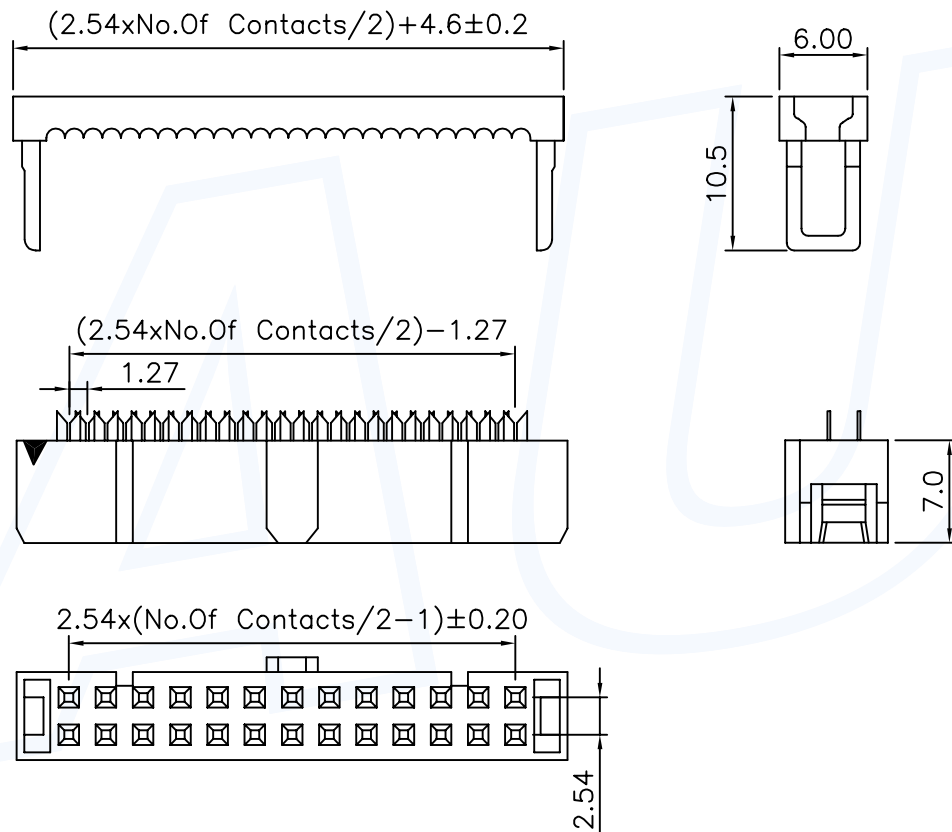

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY	IDC	APPROVED BY	MEI
PART NO.	FC20XXT	CHECKED BY	RAN
DRAWING No.	FC20XXT	DRAWING BY	LXH
SCALE	NONE	REV.	A

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.20
.XX ±0.10
AWG.
UNIT
mm

AREA	REVISIONS	CHK	DATE