





SHARLIGHT ELECTRONICS CO., LTD.

SPECIFICATION FOR APPROVAL

Part No. : SLR-05MUR40-030E9TA

Package Dimensions

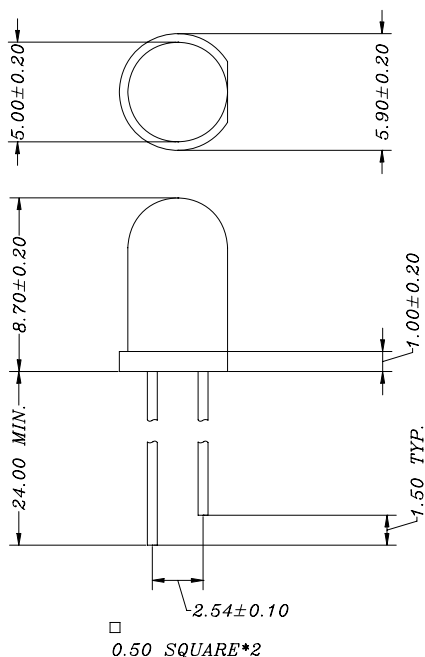

- Notes: 1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}(.010")$ unless otherwise noted.
3. Protruded resin under flange is $1.0\text{mm}(.04")$ max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.

Absolute Maximum Ratings at TA=25°C


Electrical / Optical Characteristics at TA=25°C

Parameter	Maximum Rating	Unit
Power Dissipation	45	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	90	mA
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-20°C to +80°C	
Storage Temperature Range	-55°C to +100°C	
Lead Soldering Temperature [1.6mm(.063") From Body]	260°C for 5 Seconds	

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	IV	2900	5000		mcd	IF = 20mA
Viewing Angle	2θ 1/2		15		deg	IF = 20mA
Peak Emission Wavelength	λ P		639		nm	IF = 20mA
Dominant Wavelength	λ d	618	629	632	nm	IF = 20mA
Spectral Line Half-Width	Δ λ		20		nm	IF = 20mA
Forward Voltage	VF		1.9	2.4	V	IF = 20mA
Reverse Current	IR			100	μ A	VR = 5V

TYPICAL ELECTRON-OPTICAL CHARACTERISTIC CURVES

25°C Free Air Temperature Unless Otherwise Specified

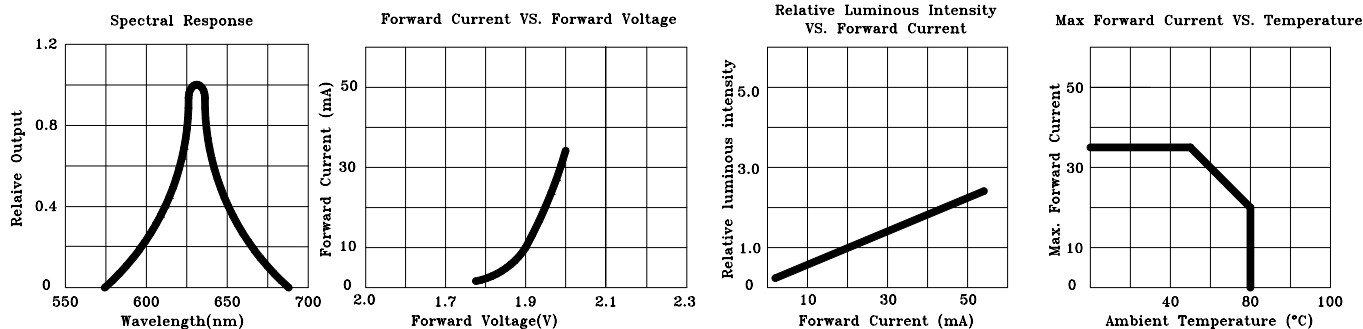

LISTER : 吳政倫 08-18-06

EDITOR : 鄭淑娟 08-18-06

DATE : 08-18-06

REV : 2