

Buffers/drivers

74F655A*
74F656A

74F655A Octal buffer/driver with parity, inverting (3-State)

74F656A Octal buffer/driver with parity, non-inverting (3-State)

FEATURES

- Significantly improved AC performance over 74F655 and 74F656
- High impedance NPN base input for reduced loading (40µA in High and Low states)
- Ideal in applications where high output drive and light bus loading are required (I_{IL} is 40µA vs. FAST std of 600µA)
- 74F655A combines 74F240 and 74F280A functions in one package
- 74F656A combines 74F244 and 74F280A functions in one package
- 74F655A Inverting
- 74F656A Non-inverting
- 3-State outputs sink 64mA and source 15mA
- 24-pin plastic Slim DIP (300mil) package
- Inputs on one side and outputs on the other side simplifies PC board layout
- Combined functions reduce part count and enhance system performance
- Industrial temperature range available (−40°C to +85°C)

DESCRIPTION

The 74F655A and 74F656A are octal buffers and line drivers with parity generation/checking designed to be employed as memory address drivers, clock drivers and bus-oriented transmitters/receivers. These parts include parity generator/checker to improve PC board density.

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74F655A	6.5ns	64mA
74F656A	6.5ns	64mA

ORDERING INFORMATION

DESCRIPTION	COMMERCIAL RANGE $V_{CC} = 5V \pm 10\%$, $T_{amb} = 0^{\circ}C$ to $+70^{\circ}C$	INDUSTRIAL RANGE $V_{CC} = 5V \pm 10\%$, $T_{amb} = -40^{\circ}C$ to $+85^{\circ}C$	PKG DWG #
24-pin Plastic Slim DIP (300mil)	N74F656AN	I74F656AN	SOT222-1
24-pin Plastic SOL	N74F656AD	I74F656AD	SOT137-1

INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	74F(U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
D0–D7	Data inputs	2.0/0.066	40µA/40µA
PI	Parity input	1.0/0.033	20µA/20µA
$\overline{OE}0, \overline{OE}1, \overline{OE}2$	Output Enable Inputs (active Low)	1.0/0.033	20µA/20µA
$\Sigma E, \Sigma O$	Parity outputs	750/106.7	15mA/64mA
$\overline{Q}0\text{--}\overline{Q}7$	Data outputs (74F655A)	750/106.7	15mA/64mA
Q0–Q7	Data outputs (74F656A)	750/106.7	15mA/64mA

NOTE: One (1.0) FAST Unit Load (U.L.) is defined as: 20µA in the High state and 0.6mA in the Low state.


Buffers/drivers

74F655A*
74F656A


PIN CONFIGURATION – 74F655A

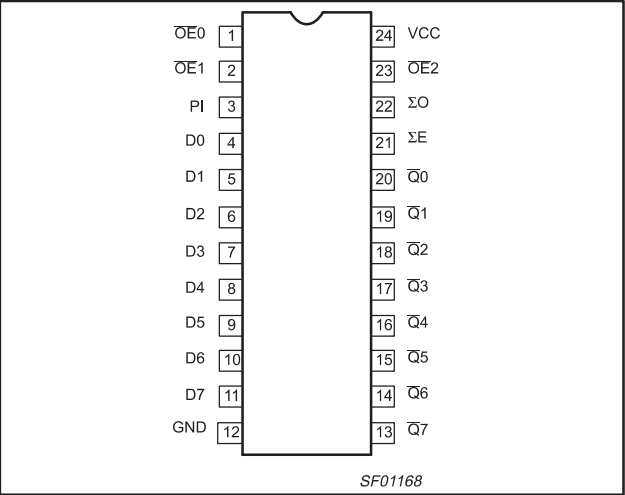


PIN CONFIGURATION – 74F656A

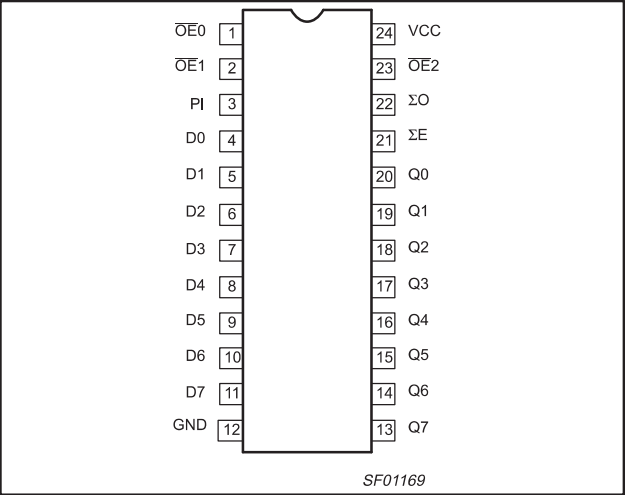


LOGIC SYMBOL – 74F655A

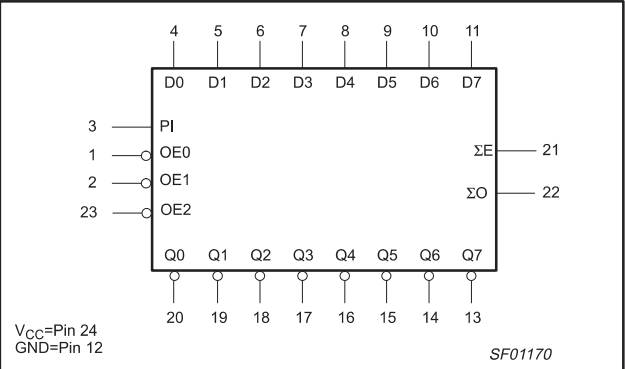


LOGIC SYMBOL – 74F656A

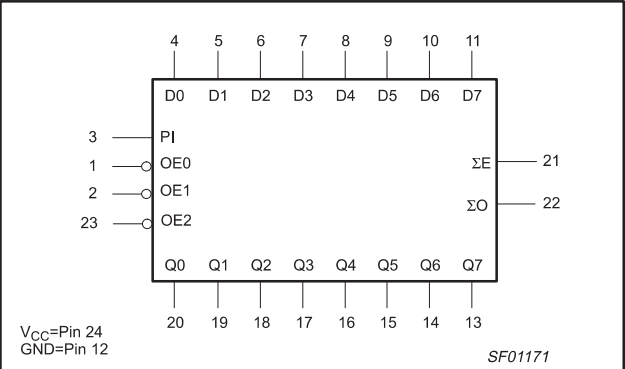

IEEE/IEC SYMBOL – 74F655A

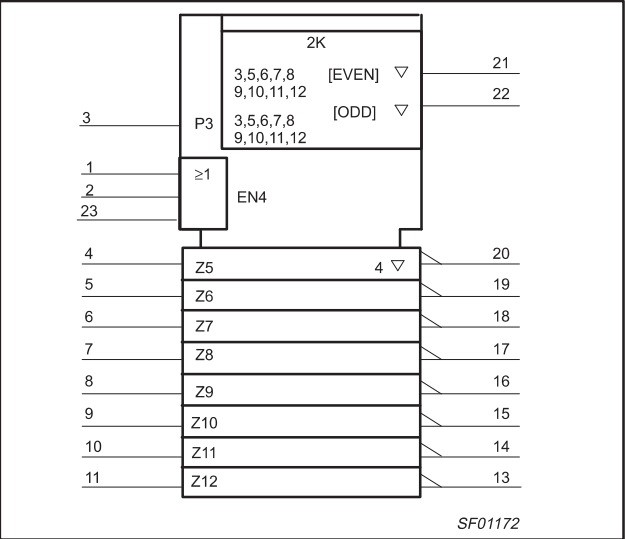

LOGIC SYMBOL (IEEE/IEC) – 74F656A

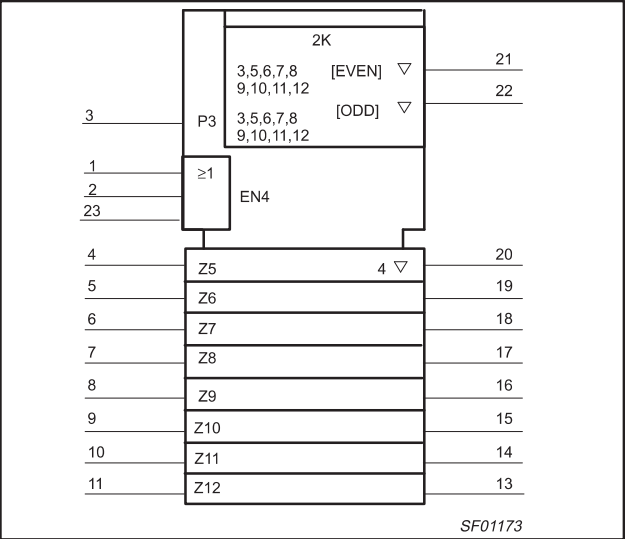


* Discontinued part. Please see the Discontinued Products List.

Buffers/drivers

74F655A*
74F656A

LOGIC DIAGRAM – 74F655A

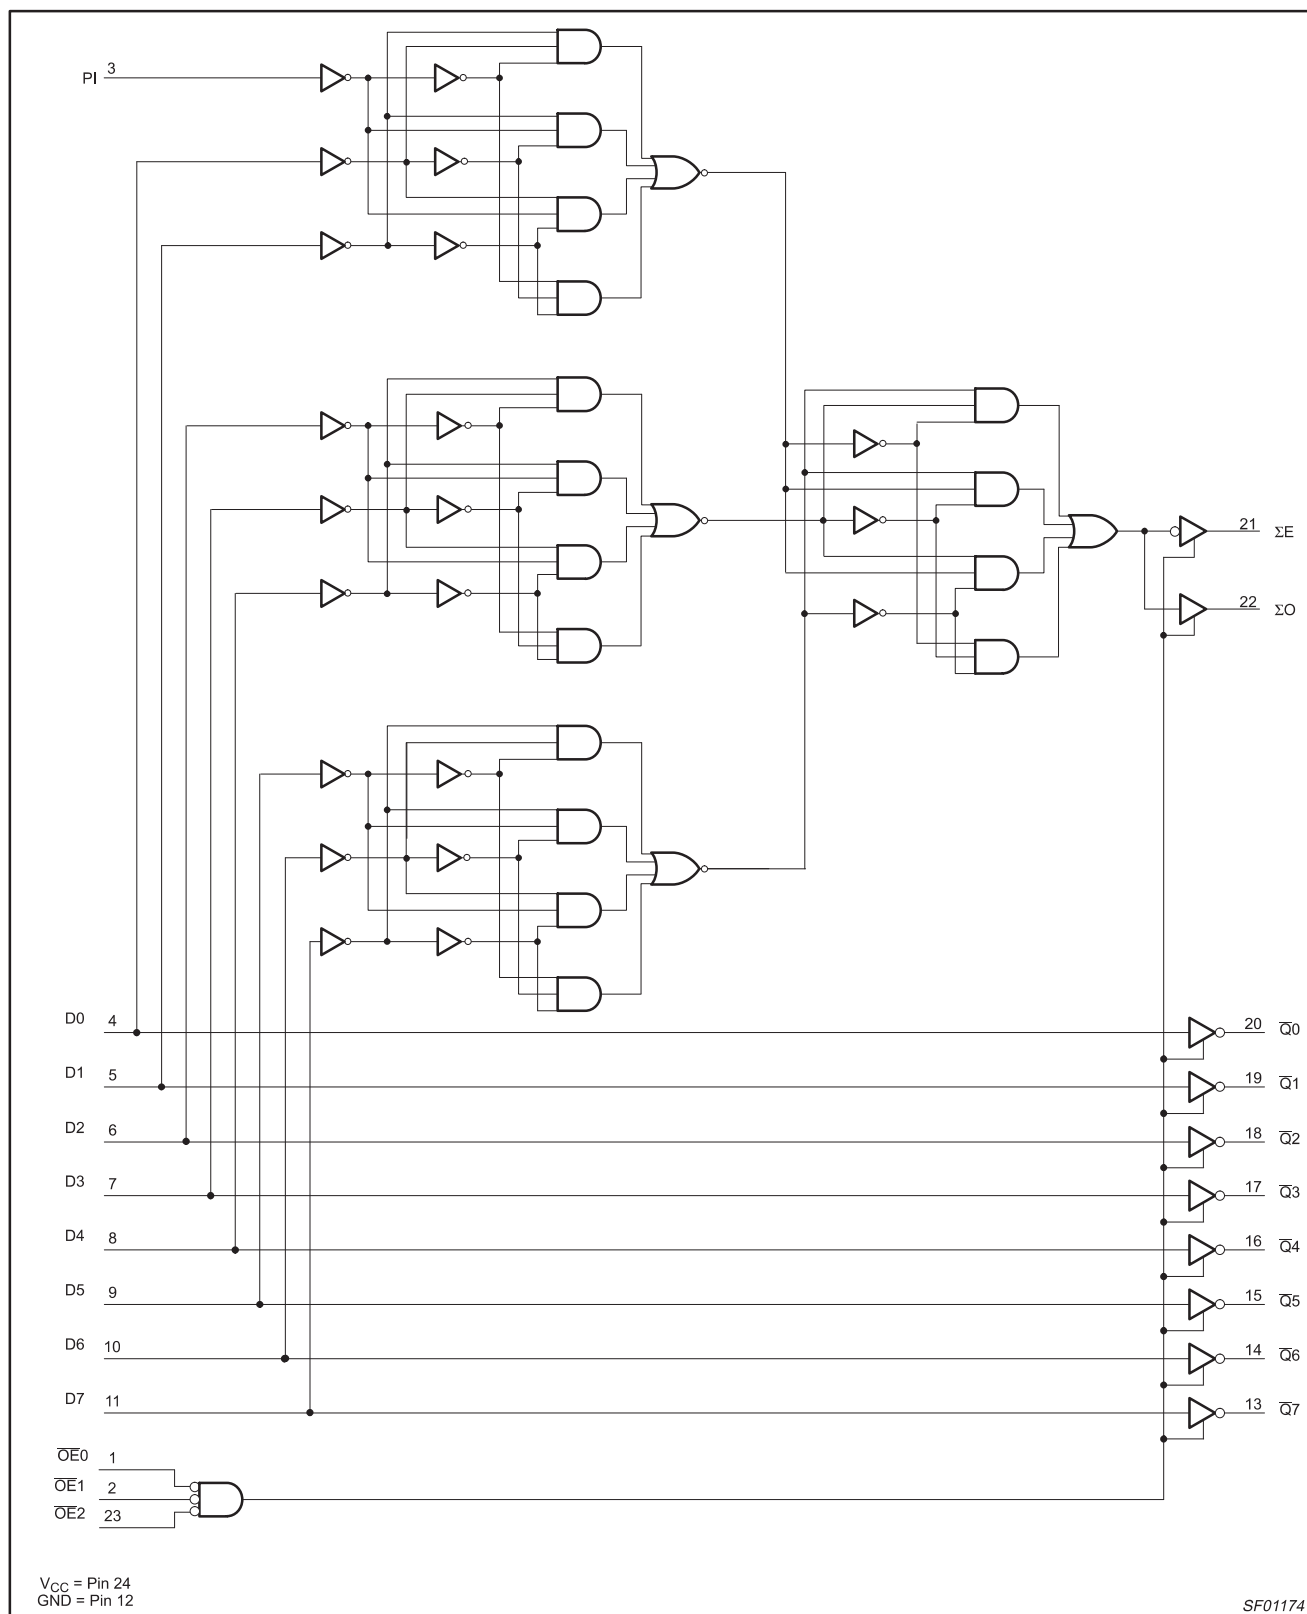


SF01174

* Discontinued part. Please see the Discontinued Products List.

Buffers/drivers

74F655A*
74F656A

LOGIC DIAGRAM – 74F656A

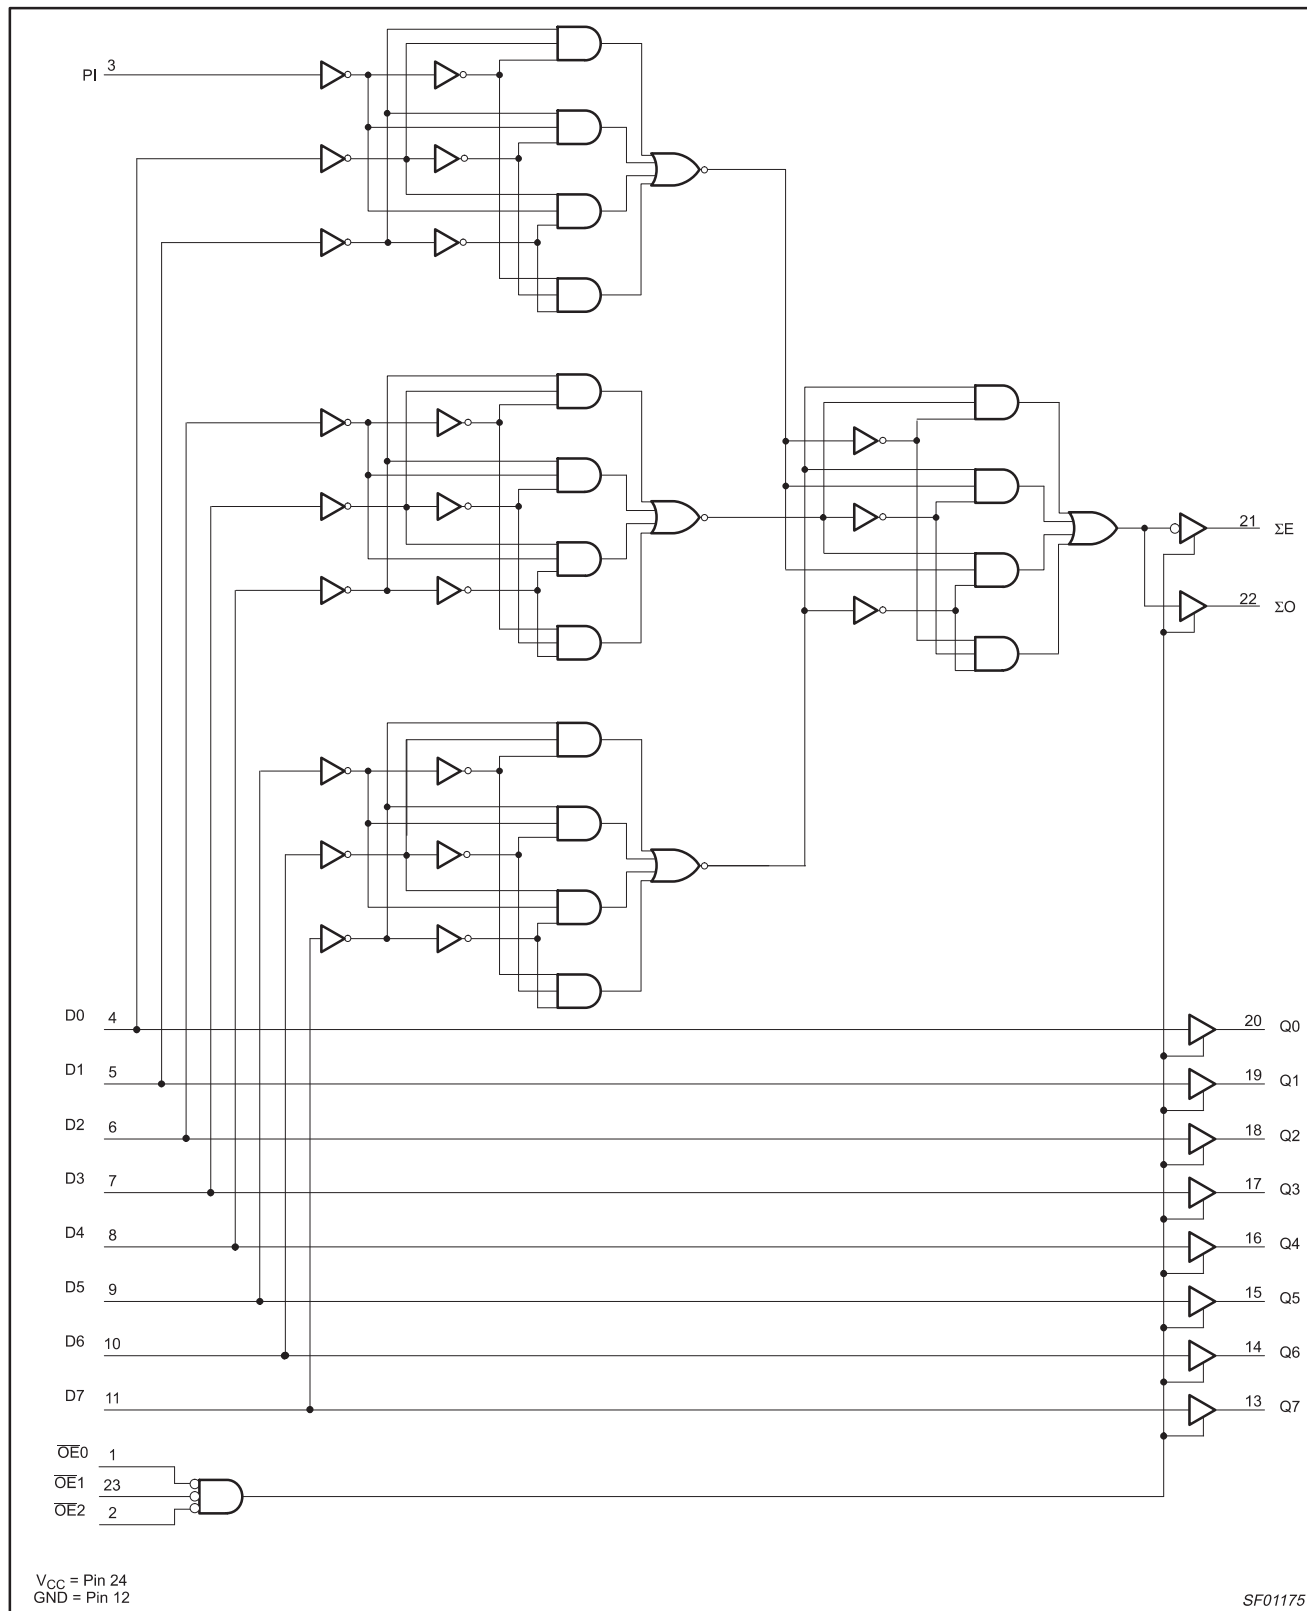

* Discontinued part. Please see the Discontinued Products List.

Buffers/drivers

74F655A*
74F656A

FUNCTION TABLE

INPUTS				OUTPUTS	
$\overline{OE}0$	$\overline{OE}1$	$\overline{OE}2$	D_n	74F655A $\overline{Q}_n$	74F656A Q_n
L	L	L	L	H	L
L	L	L	H	L	H
H	X	X	X	Z	Z
X	H	X	X	Z	Z
X	X	H	X	Z	Z

H = High voltage level
 L = Low voltage level
 X = Don't care
 Z = High impedance "off" state

FUNCTION TABLE for PARITY OUTPUTS

INPUTS	PARITY OUTPUTS	
Number of inputs, High (PI, D0–D7)	ΣE	ΣO
Even - 0, 2, 4, 6, 8	H	L
Odd - 1, 3, 5, 7, 9	L	H
Any $\overline{OE}_n$ = High	Z	Z

H = High voltage level
 L = Low voltage level
 Z = High impedance "off" state

ABSOLUTE MAXIMUM RATINGS

(Operation beyond the limits set forth in this table may impair the useful life of the device.
 Unless otherwise noted these limits are over the operating free-air temperature range.)

SYMBOL	PARAMETER		RATING	UNIT
V_{CC}	Supply voltage		–0.5 to +7.0	V
V_{IN}	Input voltage		–0.5 to +7.0	V
I_{IN}	Input current		–30 to +5	mA
V_{OUT}	Voltage applied to output in High output state		–0.5 to V_{CC}	V
I_{OUT}	Current applied to output in Low output state		128	mA
T_{amb}	Operating free-air temperature range	Commercial range	0 to +70	°C
		Industrial range	–40 to +85	°C
T_{stg}	Storage temperature range		–65 to +150	°C

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	LIMITS			UNIT
		MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5.0	5.5	V
V_{IH}	High-level input voltage	2.0			V
V_{IL}	Low-level input voltage			0.8	V
I_{IK}	Input clamp current			–18	mA
I_{OH}	High-level output current			–15	mA
I_{OL}	Low-level output current			64	mA
T_{amb}	Operating free-air temperature range	Commercial range	0	70	°C
		Industrial range	–40	85	°C

* Discontinued part. Please see the Discontinued Products List.

Buffers/drivers

74F655A*
74F656A

DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER			TEST CONDITIONS ^{NO TAG}			LIMITS			UNIT
							MIN	TYP NO TAG	MAX	
V _{OH}	High-level output voltage			V _{CC} = MIN, V _{IL} = MAX V _{IH} = MIN	I _{OH} = −3mA	±10%V _{CC}	2.4			V
						±5%V _{CC}	2.7	3.3		V
					I _{OH} = −15mA	±10%V _{CC}	2.0			V
V _{OL}	Low-level output voltage			V _{CC} = MIN, V _{IL} = MAX V _{IH} = MIN	I _{OL} = 64mA	±10%V _{CC}			0.55	V
						±5%V _{CC}		0.42	0.55	V
V _{IK}	Input clamp voltage			V _{CC} = MIN, I _I = I _{IK}				−0.73	−1.2	V
I _I	Input current at maximum input voltage			V _{CC} = 0.0, V _I = 7.0V					100	μA
I _{IH}	High-level input current	Commercial range	Dn	V _{CC} = MAX, V _I = 2.7V					40	μA
			PI, $\overline{OE}_n$						20	μA
		Industrial range	Dn						80	μA
			PI, $\overline{OE}_n$						40	μA
I _{IL}	Low-level input current		Dn	V _{CC} = MAX, V _I = 0.5V					−40	μA
			PI, $\overline{OE}_n$						−20	μA
I _{OZH}	Off-state current High-level voltage applied			V _{CC} = MAX, V _O = 2.7V					50	μA
I _{OZL}	Off-state current Low-level voltage applied			V _{CC} = MAX, V _O = 0.5V					−50	μA
I _{OS}	Short-circuit output current ³			V _{CC} = MAX			−100		−225	mA
I _{CC}	Supply current (total)	I _{CCH}		V _{CC} = MAX				50	80	mA
		I _{CCL}						78	110	mA
		I _{CCZ}						83	90	mA

NOTES:

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- All typical values are at V_{CC} = 5V, T_{amb} = 25°C.
- Not more than one output should be shorted at a time. For testing I_{OS}, the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a High output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests, I_{OS} tests should be performed last.

AC ELECTRICAL CHARACTERISTICS


SYMBOL	PARAMETER		TEST CONDITIONS	LIMITS							UNIT
				T _{amb} = +25°C, V _{CC} = +5.0V C _L = 50pF, R _L = 500Ω			T _{amb} = 0°C to +70°C V _{CC} = +5.0V ± 10% C _L = 50pF, R _L = 500Ω		T _{amb} = −40°C to +85°C V _{CC} = +5.0V ± 10% C _L = 50pF, R _L = 500Ω		
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{PLH} t _{PHL}	Propagation delay Dn to Qn	74F655A	Waveform 2	2.0 1.0	4.5 2.5	6.5 4.0	2.0 1.0	7.5 4.5	2.0 1.0	8.5 5.5	ns ns
t _{PLH} t _{PHL}	Propagation delay Dn to Qn	74F656A	Waveform 1	2.0 2.5	4.0 5.5	6.5 7.0	2.0 2.5	7.0 7.5	2.0 2.5	8.0 9.0	ns ns
t _{PLH} t _{PHL}	Propagation delay Dn to ΣE, ΣO		Waveform 1, 2	5.5 5.5	10.0 11.0	13.0 14.5	5.5 5.5	14.0 16.5	4.5 5.5	16.5 18.0	ns ns
t _{PZH} t _{PZL}	Output enable time to High or Low level		Waveform 3 Waveform 4	3.5 4.0	7.0 8.0	10.5 11.0	3.5 4.5	11.5 12.0	3.0 4.0	13.0 13.5	ns ns
t _{PHZ} t _{PLZ}	Output disable time from High or Low level		Waveform 3 Waveform 4	1.5 2.0	4.5 5.0	8.0 8.0	1.5 2.0	9.0 9.0	1.5 1.5	10.0 10.0	ns ns

* Discontinued part. Please see the Discontinued Products List.


Buffers/drivers

74F655A*
74F656A


AC WAVEFORMS

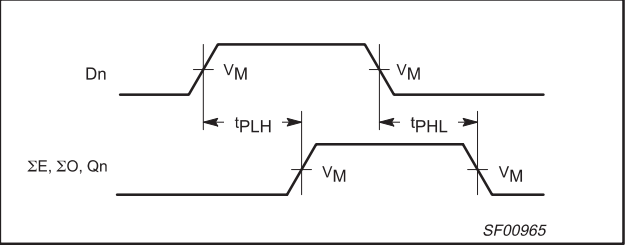


Waveform 1. Propagation Delay, Non-Inverting Outputs

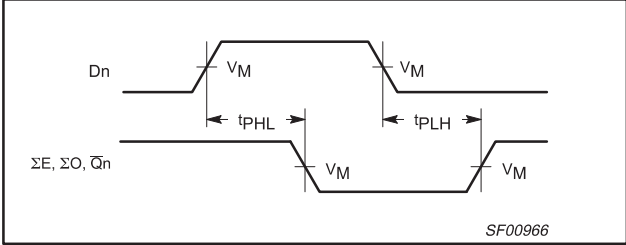

Waveform 2. Propagation Delay, Inverting Outputs

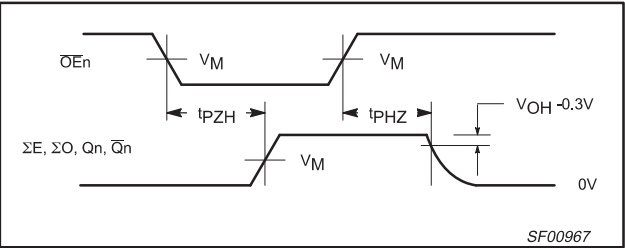


Waveform 3. 3-State Output Enable Time to High Level and Output Disable Time from High Level

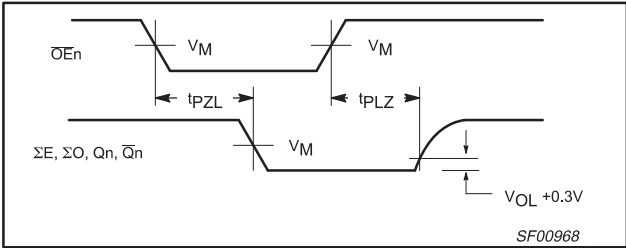

Waveform 4. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

TEST CIRCUIT AND WAVEFORM

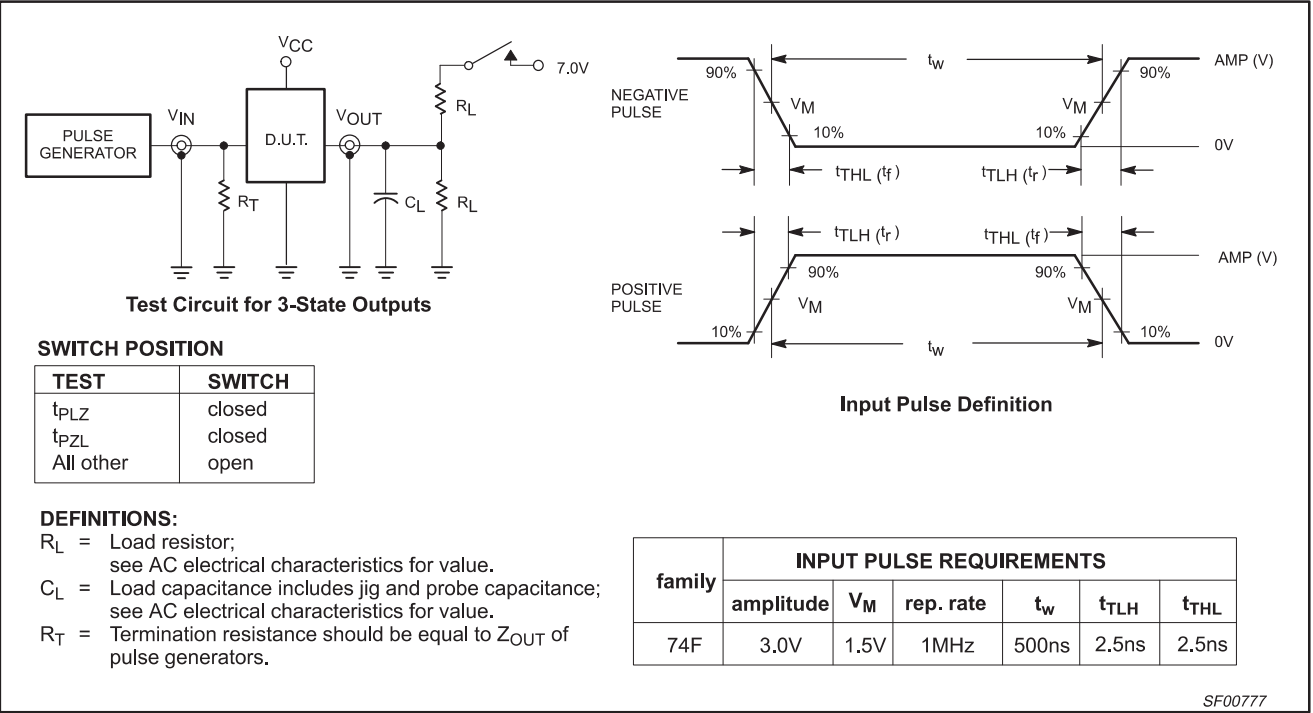


* Discontinued part. Please see the Discontinued Products List.

Buffers/drivers

74F655A*, 74F656A

DIP24: plastic dual in-line package; 24 leads (300 mil)

SOT222-1

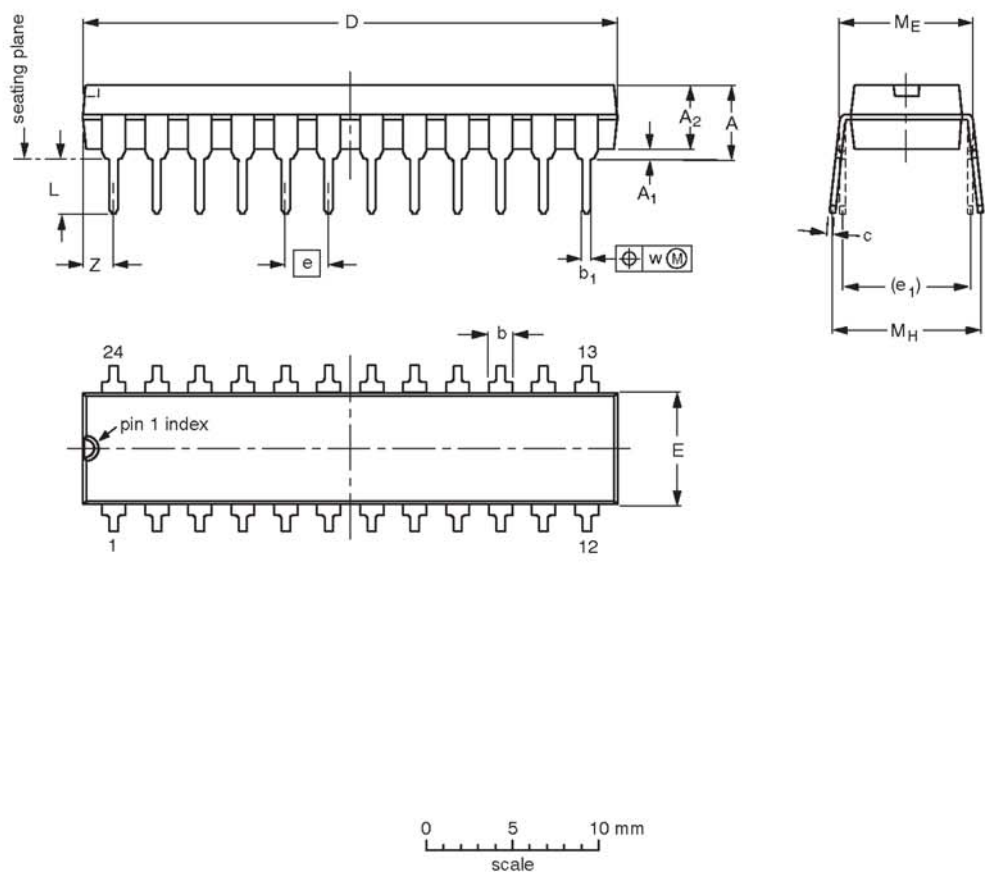

DIMENSIONS (millimetre dimensions are derived from the original inch dimensions)

UNIT	A max.	A ₁ min.	A ₂ max.	b	b ₁	c	D ⁽¹⁾	E ⁽¹⁾	e	e ₁	L	M _E	M _H	w	Z ⁽¹⁾ max.
mm	4.70	0.38	3.94	1.63 1.14	0.56 0.43	0.36 0.25	31.9 31.5	6.73 6.48	2.54	7.62	3.51 3.05	8.13 7.62	10.03 7.62	0.25	2.05
inches	0.185	0.015	0.155	0.064 0.045	0.022 0.017	0.014 0.010	1.256 1.240	0.265 0.255	0.100	0.300	0.138 0.120	0.32 0.30	0.395 0.300	0.01	0.081

Note
1. Plastic or metal protrusions of 0.01 inches maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT222-1		MS-001AF				95-03-11


* Discontinued part. Please see the Discontinued Product List.

Buffers/drivers

74F655A*, 74F656A

SO24: plastic small outline package; 24 leads; body width 7.5 mm

SOT137-1

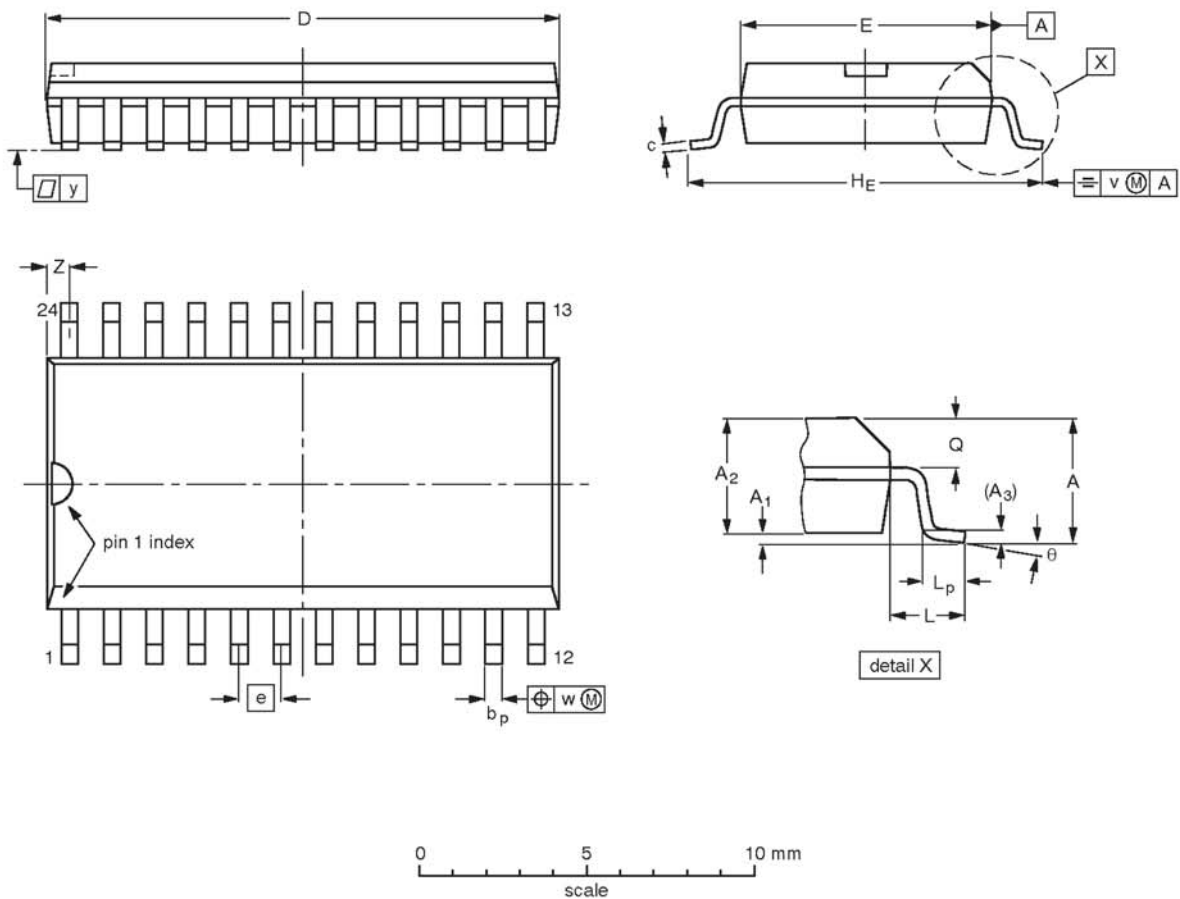

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	2.65	0.30 0.10	2.45 2.25	0.25	0.49 0.36	0.32 0.23	15.6 15.2	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8° 0°
inches	0.10	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.61 0.60	0.30 0.29	0.050	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT137-1	075E05	MS-013AD				-95-01-24 97-05-22

* Discontinued part. Please see the Discontinued Product List.