

Quad timer

NE5558

DESCRIPTION

The NE558 Quad Timers are monolithic timing devices which can be used to produce four independent timing functions. The NE558 output sinks current. These highly stable, general purpose controllers can be used in a monostable mode to produce accurate time delays—from microseconds to hours. In the time delay mode of operation, the time is precisely controlled by one external resistor and one capacitor. A stable operation can be achieved by using two of the four timer sections.

The four timer sections in the NE558 are edge-triggered; therefore, when connected in tandem for sequential timing applications, no coupling capacitors are required. Output current capability of 100 mA is provided in both devices.

FEATURES

- 100 mA output current per section
- Edge-triggered (no coupling capacitor)
- Output independent of trigger conditions
- Wide supply voltage range 4.5 V to 16 V
- Timer intervals from microseconds to hours
- Time period equals RC
- Military qualifications pending.

APPLICATIONS

- Sequential timing
- Time delay generation
- Precision timing
- Industrial controls
- Quad one-shot.

ORDERING INFORMATION

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE	DWG #
16-Pin Plastic Small Outline Large (SOL) Package	0 to +70 °C	NE558D	SOT162–1
16-Pin Plastic Dual In-Line Package (DIP)	0 to +70 °C	NE558N	SOT38–4

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
V_{CC}	Supply voltage	+16	V
P_D	Maximum power dissipation $T_{amb} = 25\text{ °C}$ ambient (still-air) ¹ N package D package	1450 1090	mW mW
T_{amb}	Operating ambient temperature range	0 to +70	°C
T_{stg}	Storage temperature range	–65 to +150	°C
T_{slid}	Lead soldering temperature (10 sec max)	+230	°C

NOTES:

- Derate above 25 °C, at the following rates:
N package at 11.6 mW/°C
D package at 8.7 mW/°C

PIN CONFIGURATION

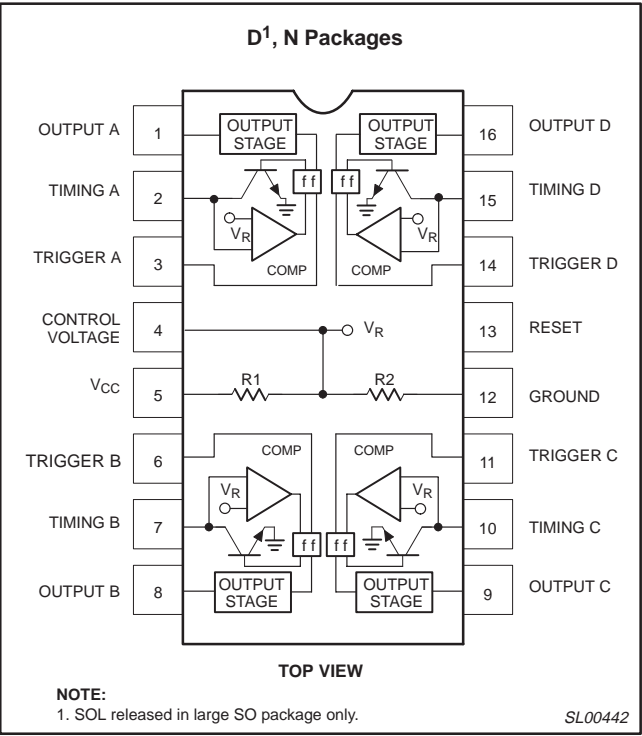


Figure 1. Pin configuration.

Quad timer

NE558

DC AND AC ELECTRICAL CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$, $V_{CC} = +5\text{ V}$ to $+15\text{ V}$, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	Min	Typ	Max	UNIT
V_{CC}	Supply voltage		4.5		16	V
I_{CC}	Supply current	$V_{CC} = \text{Reset} = 15\text{ V}$		16	36	mA
t_A	Timing accuracy ($t = RC$)	$R = 2\text{ k}\Omega$ to $100\text{ k}\Omega$; $C = 1\text{ }\mu\text{F}$		± 2	5	%
$\Delta t_A / \Delta T$	Initial accuracy			30	150	ppm/ $^{\circ}\text{C}$
$\Delta t_A / \Delta V_S$	Drift with temperature			0.1	0.9	%/V
	Drift with supply voltage					
V_{TRIG}	Trigger voltage ¹	$V_{CC} = 15\text{ V}$	0.8		2.4	V
I_{TRIG}	Trigger current	Trigger = 0 V		5	100	μA
V_{RESET}	Reset voltage ²		0.8		2.4	V
I_{RESET}	Reset current	Reset		50	500	μA
V_{TH}	Threshold voltage			$0.63 \times V_{CC}$		V
	Threshold leakage			15		nA
V_{OUT}	Output voltage ³	$I_L = 10\text{ mA}$		0.1	0.4	V
		$I_L = 100\text{ mA}$		1.0	2.0	V
	Output leakage			10	500	nA
t_{PD}	Propagation delay			1.0		μs
t_R	Rise time of output	$I_L = 100\text{ mA}$		100		ns
t_F	Fall time of output	$I_L = 100\text{ mA}$		100		ns

NOTES:

1. The trigger functions only on the falling edge of the trigger pulse only after previously being HIGH. After reset, the trigger must be brought HIGH and then LOW to implement triggering.
2. For reset below 0.8 V, outputs set LOW and trigger inhibited. For reset above 2.4 V, trigger enabled.
3. The NE558 output structure is open-collector, which requires a pull-up resistor to V_{CC} to sink current. The output is normally LOW sinking current.

Quad timer

NE555

NE558 EQUIVALENT CIRCUIT

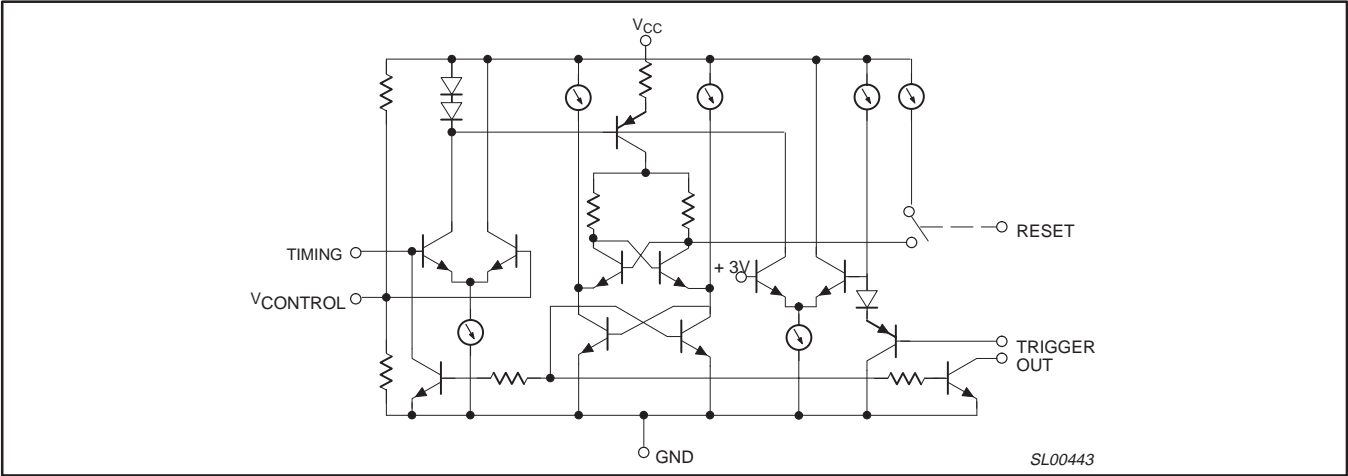


Figure 2. NE558 equivalent circuit.


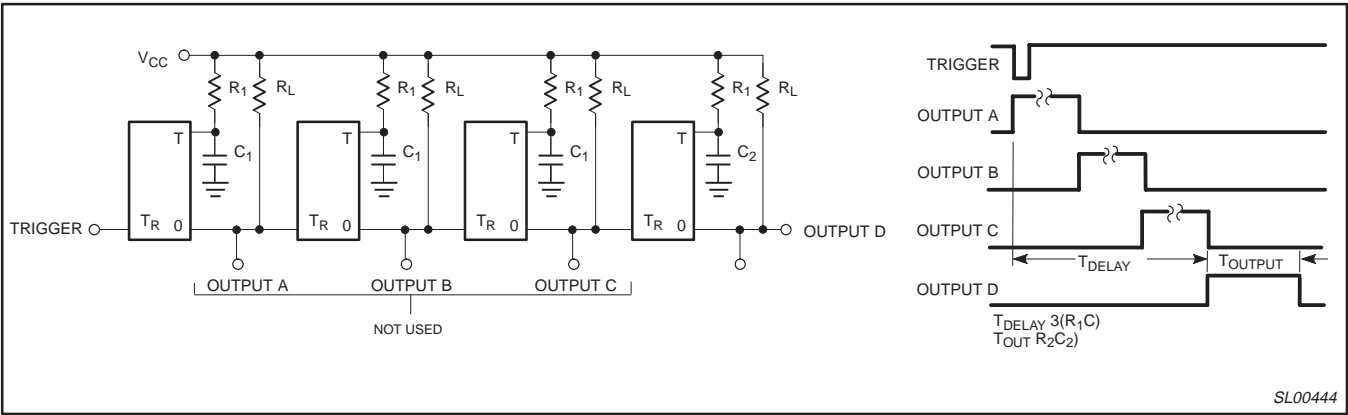


Figure 3. Long-time delay.

Quad timer

NE558

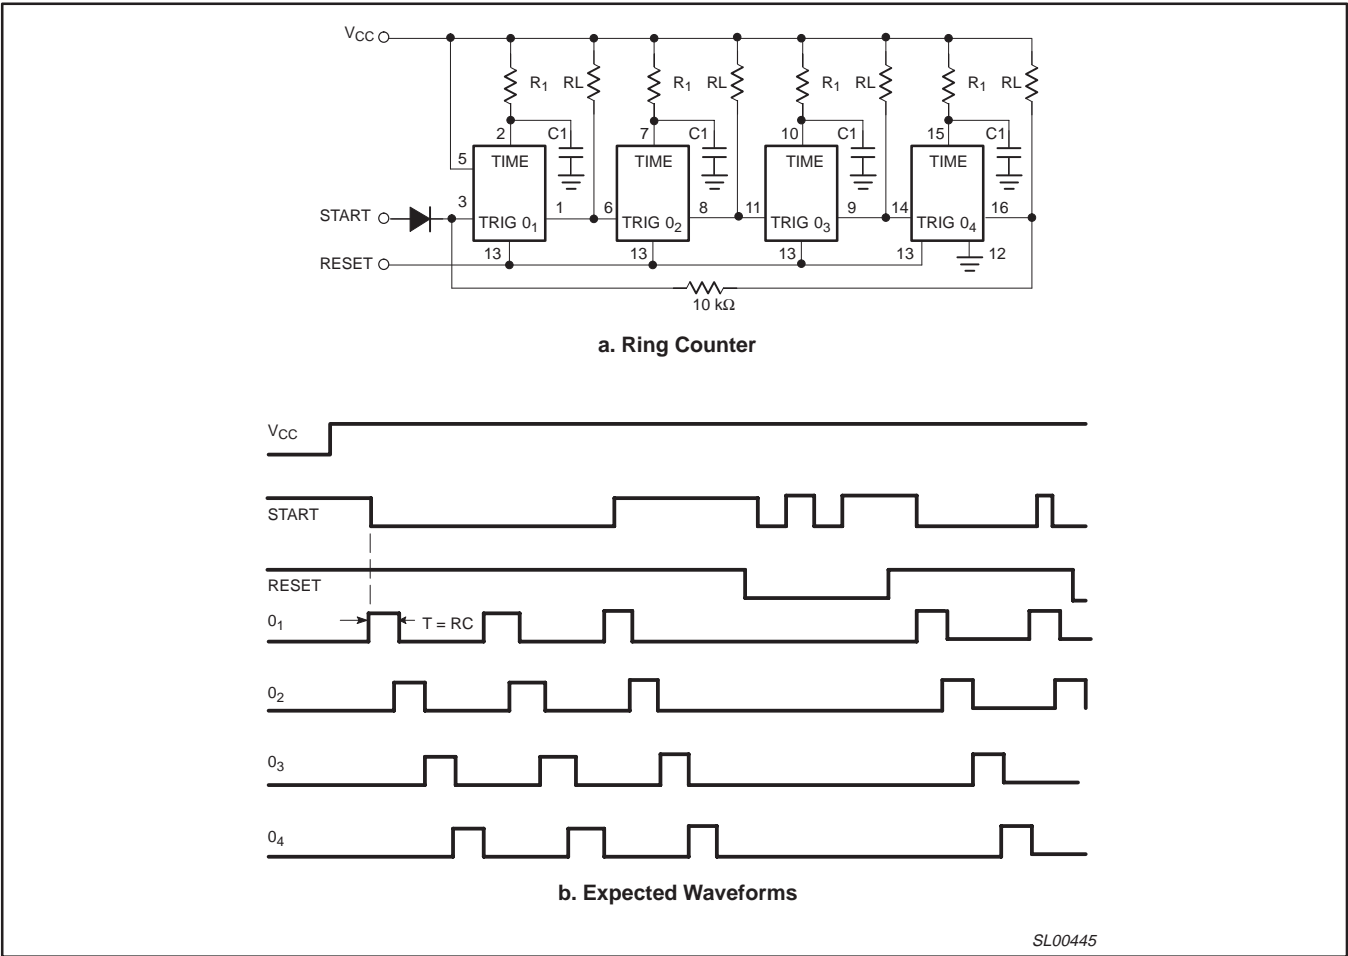

SL00445


Figure 4.

Quad timer

NE558

SO16: plastic small outline package; 16 leads; body width 7.5 mm

SOT162-1

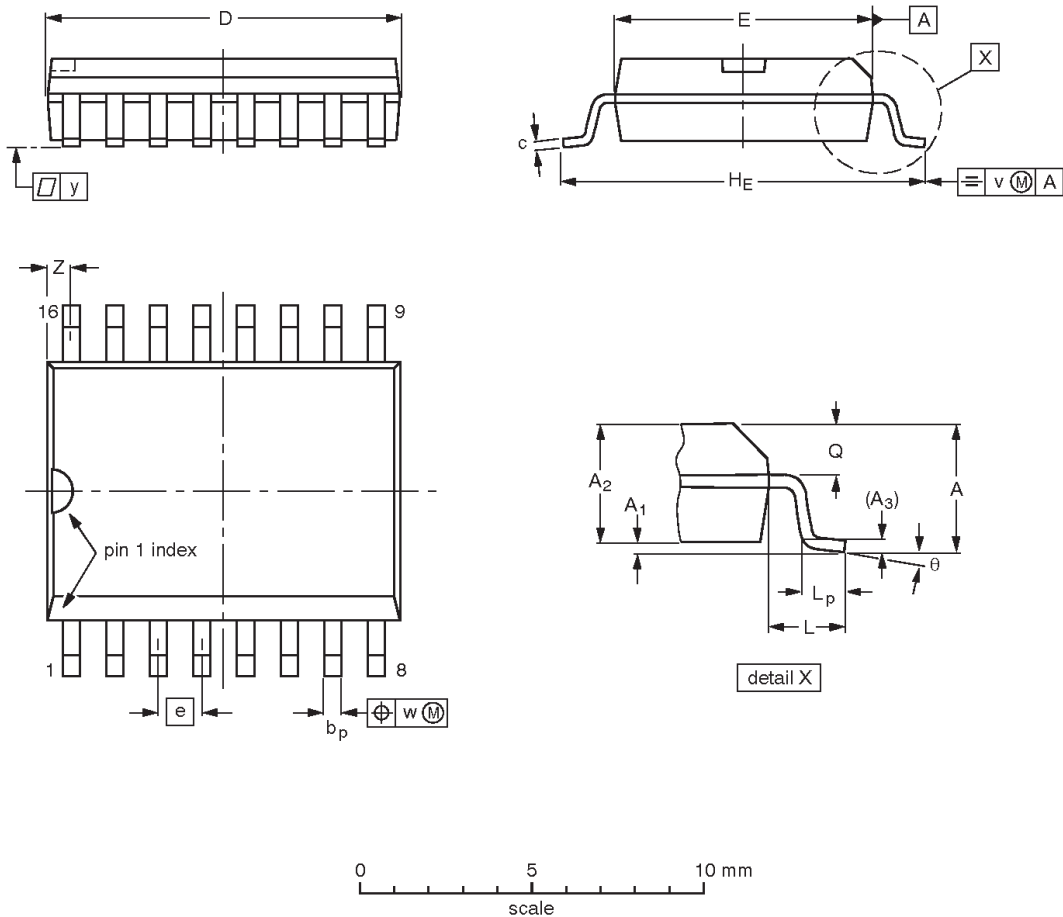


DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	2.65	0.30 0.10	2.45 2.25	0.25	0.49 0.36	0.32 0.23	10.5 10.1	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8° 0°
inches	0.10	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.41 0.40	0.30 0.29	0.050	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT162-1	075E03	MS-013				-97-05-22 99-12-27

Quad timer

NE558

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

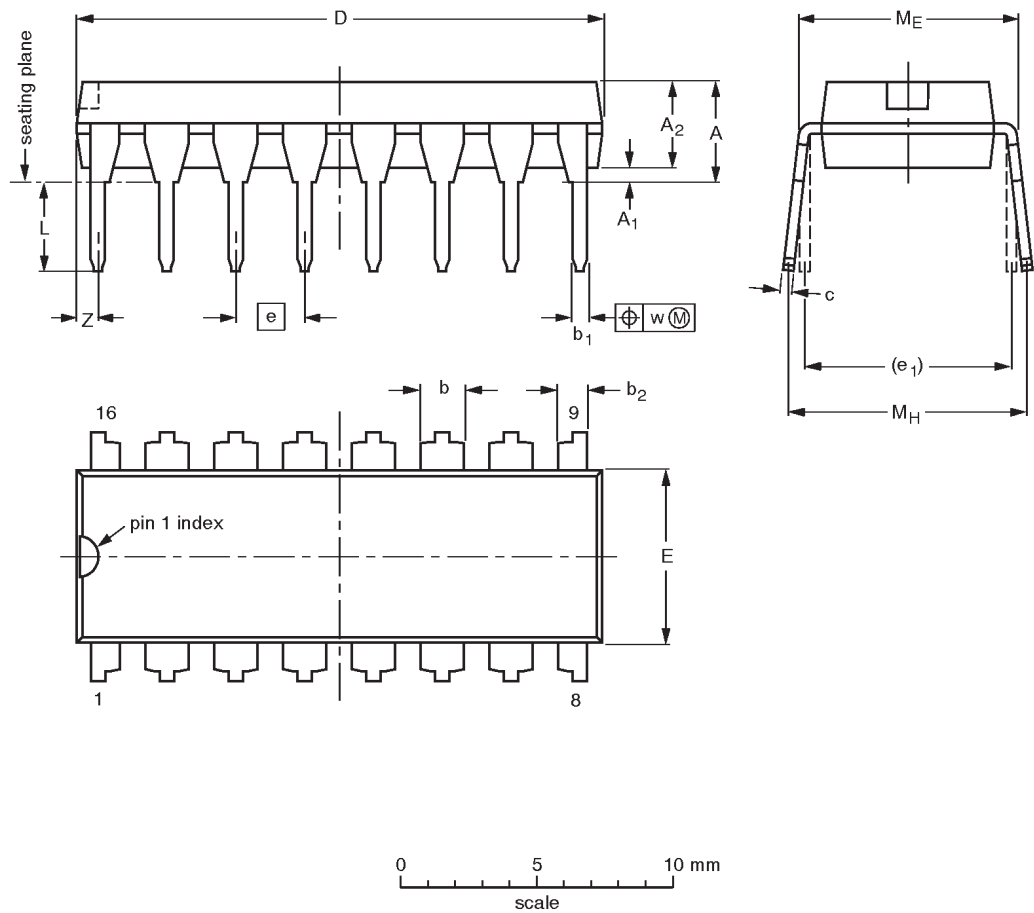

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁ min.	A ₂ max.	b	b ₁	b ₂	c	D ⁽¹⁾	E ⁽¹⁾	e	e ₁	L	M _E	M _H	w	Z ⁽¹⁾ max.
mm	4.2	0.51	3.2	1.73 1.30	0.53 0.38	1.25 0.85	0.36 0.23	19.50 18.55	6.48 6.20	2.54	7.62	3.60 3.05	8.25 7.80	10.0 8.3	0.254	0.76
inches	0.17	0.020	0.13	0.068 0.051	0.021 0.015	0.049 0.033	0.014 0.009	0.77 0.73	0.26 0.24	0.10	0.30	0.14 0.12	0.32 0.31	0.39 0.33	0.01	0.030

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT38-4						92-11-17 95-01-14