LM2903,LM393/LM393A,LM293A

Dual Differential Comparator

Features

- Single Supply Operation: 2V to 36V
- Dual Supply Operation: ±1V to ±18V
- Allow Comparison of Voltages Near Ground Potential
- Low Current Drain 800μA Typ.
- Compatible with all Forms of Logic
- Low Input Bias Current 25nA Typ.
- Low Input Offset Current ±5nA Typ.
- Low Offset Voltage ±1mV Typ.

Description

The LM2903, LM393/LM393A, LM293A consist of two independent voltage comparators designed to operate from a single power supply over a wide voltage range.

8-DIP

8-SOIC

Internal Block Diagram

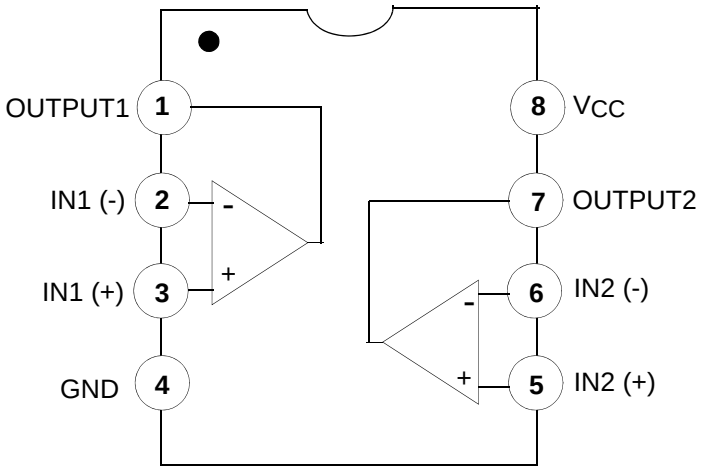

Rev. 2.0.2

©2012 Fairchild Semiconductor Corporation

Schematic Diagram

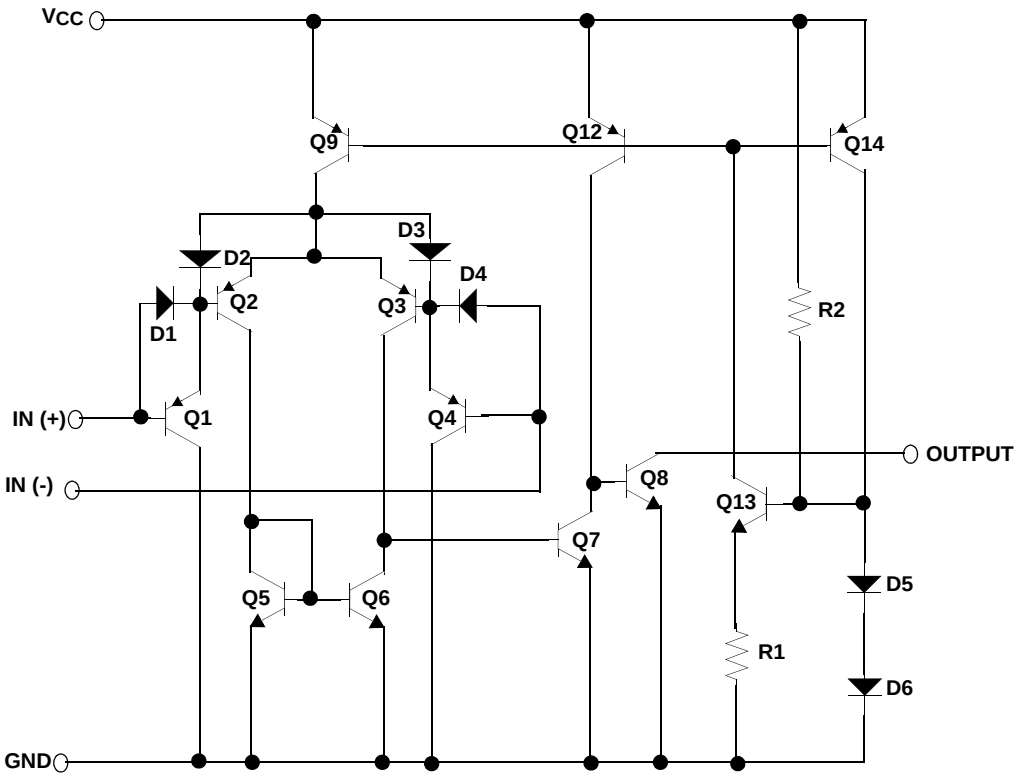

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Power Supply Voltage	V_{CC}	±18 or 36	V
Differential Input Voltage	$V_{I(DIFF)}$	36	V
Input Voltage	V_I	-0.3 to +36	V
Output Short Circuit to GND	-	Continuous	-
Power Dissipation, T_a = 25°C 8-DIP 8-SOIC	P_D	 1040 480	mW
Operating Temperature LM393/LM393A LM2903 LM293A	T_{OPR}	 0 ~ +70 -40 ~ +105 -25 ~ +85	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Ambient Max. 8-DIP 8-SOIC	$R_{\theta ja}$	 120 260	°C/W

Electrical Characteristics

(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

Parameter	Symbol	Conditions		LM293A/LM393A			LM393			Unit
				Min.	Typ.	Max.	Min.	Typ.	Max.	
Input Offset Voltage	V_{IO}	$V_{O(P)}$ =1.4V, R_S = 0Ω		-	±1	±2	-	±1	±5	mV
		V_{CM}= 0 to 1.5V	Note1	-	-	±4.0	-	-	±9.0	
Input Offset Current	I_{IO}			-	±5	±50	-	±5	±50	nA
			Note1	-	-	±150	-	-	±150	
Input Bias Current	I_{BIAS}			-	65	250	-	65	250	nA
			Note1	-	-	400	-	-	400	
Input Common Mode Voltage Range	$V_{I(R)}$			0	-	V_{CC} -1.5	0	-	V_{CC} -1.5	V
			Note1	0	-	V_{CC}-2	0	-	V_{CC}-2	
Supply Current	I_{CC}	R_L = ∞ , V_{CC} = 5V		-	0.6	1	-	0.6	1	mA
		R_L = ∞, V_{CC} = 30V		-	0.8	2.5	-	0.8	2.5	
Voltage Gain	G_V	V_{CC} =15V, R_L ≥ 15kΩ (for large $V_{O(P-P)swing}$)		50	200	-	50	200	-	V/mV
Large Signal Response Time	T_{LRES}	V_I =TTL Logic Swing V_{REF} =1.4V, V_{RL} = 5V, R_L = 5.1kΩ		-	350	-	-	350	-	nS
Response Time	T_{RES}	V_{RL} =5V, R_L =5.1kΩ		-	1.4	-	-	1.4	-	μS
Output Sink Current	I_{SINK}	$V_{I(-)}$ ≥ 1V, $V_{I(+)}$ =0V, $V_{O(P)}$ ≤1.5V		6	18	-	6	18	-	mA
Output Saturation Voltage	V_{SAT}	$V_{I(-)}$ ≥ 1V, VI(+) = 0V		-	160	400	-	160	400	mV
		I_{SINK} = 4mA	Note1	-	-	700	-	-	700	
Output Leakage Current	$I_{O(LKG)}$	$V_{I(-)}$ = 0V, $V_{I(+)}$ = 1V	$V_{O(P)}$ = 5V	-	0.1	-	-	0.1	-	nA
			$V_{O(P)}$ = 30V	-	-	1.0	-	-	1.0	μA

Note1
LM393/LM393A: 0 ≤ T_A ≤ +70°C
LM2903: -40 ≤ T_A ≤ +105°C
LM293A : -25 ≤ T_A ≤ +85°C

Electrical Characteristics (Continued)

(V_{CC} = 5V, T_A = 25°C, unless otherwise specified)

Parameter	Symbol	Conditions		LM2903			Unit
				Min.	Typ.	Max.	
Input Offset Voltage	V_{IO}	$V_{O(P)}$ =1.4V, R_S = 0Ω		-	±1	±7	mV
		V_{CM}= 0 to 1.5V	Note1	-	±9	±15	
Input Offset Current	I_{IO}			-	±5	±50	nA
			Note1	-	±50	±200	
Input Bias Current	I_{BIAS}			-	65	250	nA
			Note1	-	-	500	
Input Common Mode Voltage Range	$V_{I(R)}$			0	-	V_{CC} -1.5	V
			Note1	0	-	V_{CC}-2	
Supply Current	I_{CC}	R_L = ∞, V_{CC} = 5V		-	0.6	1	mA
		R_L = ∞, V_{CC} = 30V		-	1	2.5	
Voltage Gain	G_V	V_{CC} =15V, R_L≥15kΩ (for large $V_{O(P-P)swing}$)		25	100	-	V/mV
Large Signal Response Time	T_{LRES}	V_I =TTL Logic Swing V_{REF} =1.4V, V_{RL} = 5V, R_L = 5.1kΩ		-	350	-	nS
Response Time	T_{RES}	V_{RL} = 5V, R_L = 5.1kΩ		-	1.5	-	μS
Output Sink Current	I_{SINK}	$V_{I(-)}$ ≥ 1V, $V_{I(+)}$ = 0V, $V_{O(P)}$ ≤ 1.5V		6	16	-	mA
Output Saturation Voltage	V_{SAT}	$V_{I(-)}$ ≥ 1V, VI(+) = 0V		-	160	400	mV
		I_{SINK} = 4mA	Note1	-	-	700	
Output Leakage Current	$I_{O(LKG)}$	$V_{I(-)}$ = 0V,	$V_{O(P)}$ = 5V	-	0.1	-	nA
		$V_{I(+)}$ = 1V	$V_{O(P)}$ = 30V	-	-	1.0	μA

Note1
LM393/LM393A: 0 ≤ T_A ≤ +70°C
LM2903: -40 ≤ T_A ≤ +105°C
LM293A : -25 ≤ T_A ≤ +85°C

Mechanical Dimensions

Package

Dimensions in millimeters

8-DIP

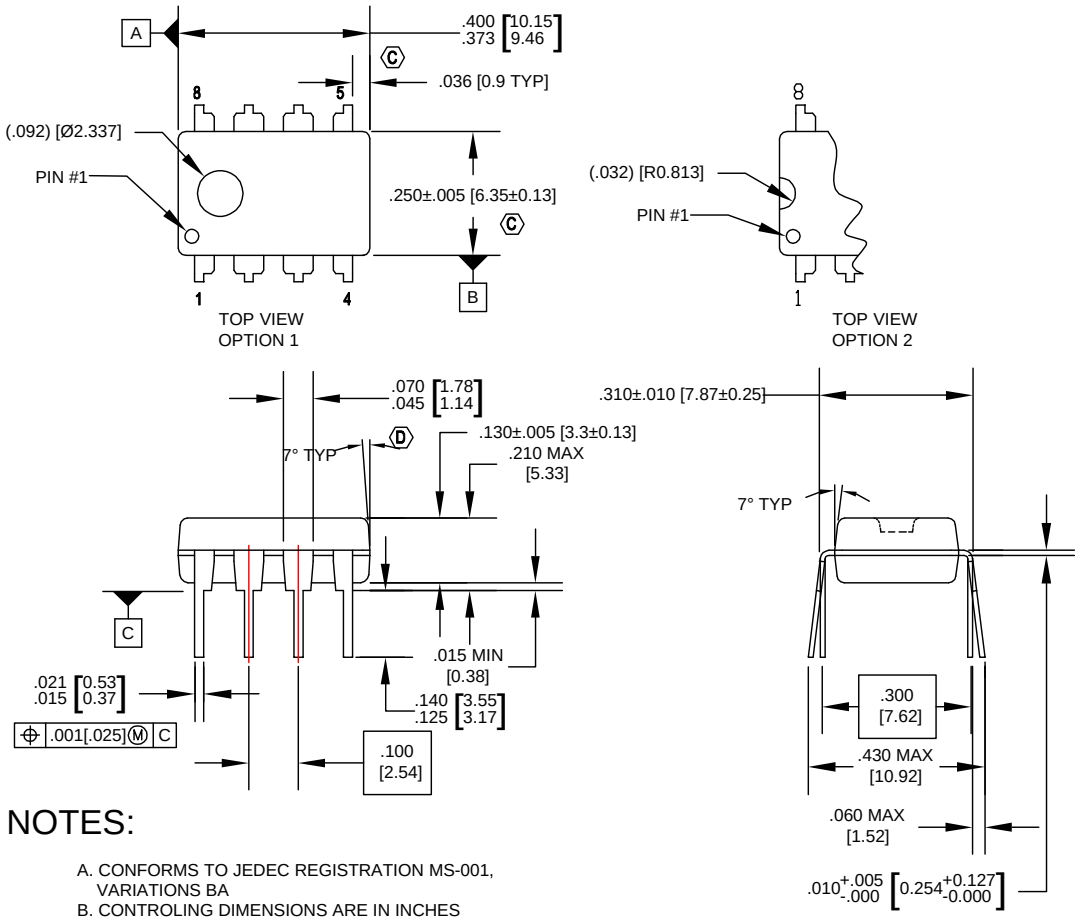

NOTES:

A. CONFORMS TO JEDEC REGISTRATION MS-001, VARIATIONS BA
B. CONTROLING DIMENSIONS ARE IN INCHES REFERENCE DIMENSIONS ARE IN MILLIMETERS
C. DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCHES OR 0.25MM.
D. DOES NOT INCLUDE DAMBAR PROTRUSIONS. DAMBAR PROTRUSIONS SHALL NOT EXCEED .010 INCHES OR 0.25MM.
E. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.

N08EREVG

Mechanical Dimensions (Continued)

Package

Dimensions in millimeters

8-SOIC

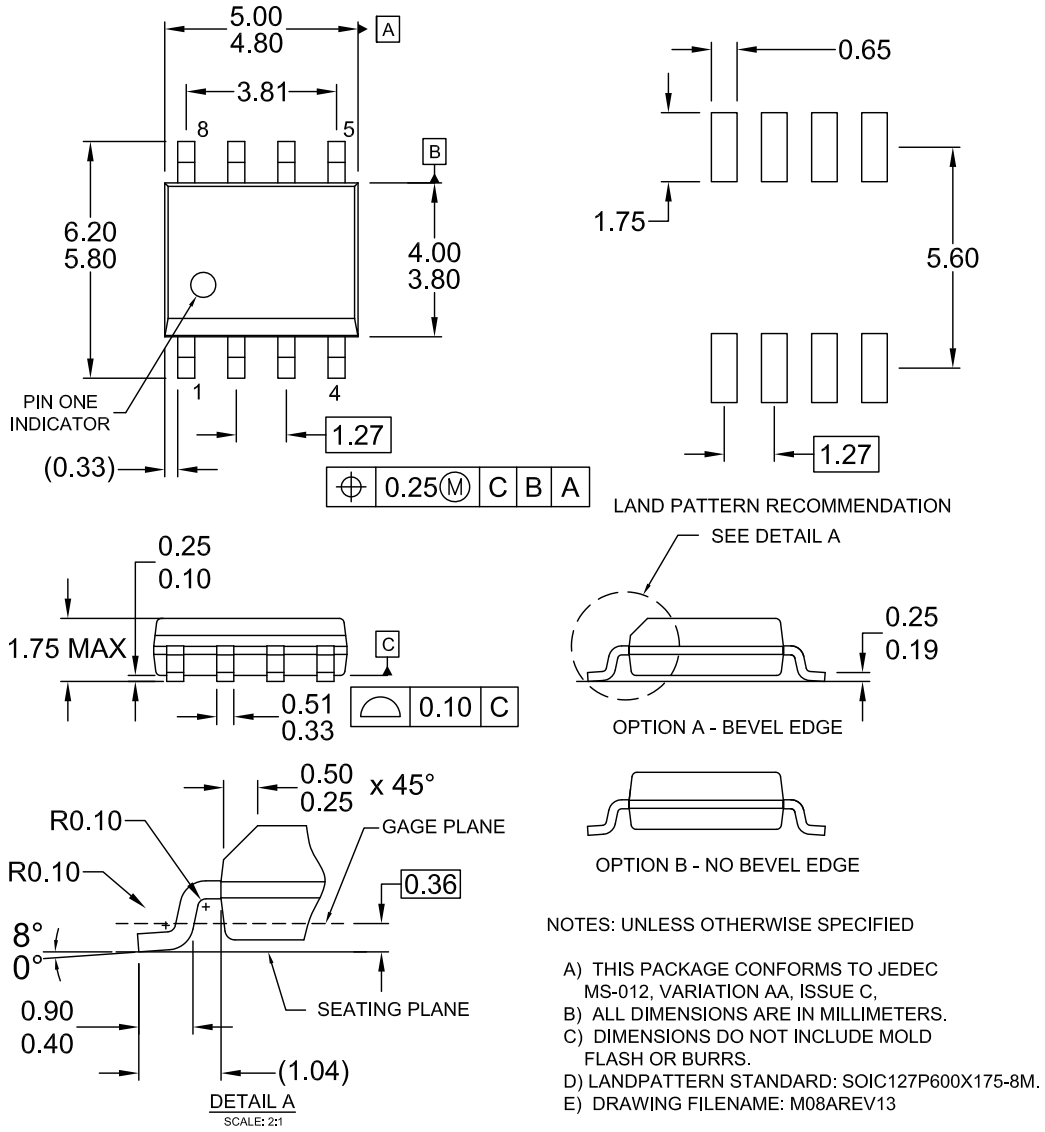

NOTES: UNLESS OTHERWISE SPECIFIED

A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AA, ISSUE C,
B) ALL DIMENSIONS ARE IN MILLIMETERS.
C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
D) LANDPATTERN STANDARD: SOIC127P600X175-8M.
E) DRAWING FILENAME: M08AREV13