




ZIPPY TECHNOLOGY CORP.


VMN-10L-05A2-B microswitches/Snap-acting switches

SWITCH TYPE	PART SUFFIX	OF Max. (gf)						OP (mm)	PT Max. (mm)	OT Min. (mm)	MD Max. (mm)
VMN-□□□-05 □□-B2		B	D	N	L	S	H	SPECIFY H	20.7±0.8	1.72	0.60
		20	55	80	110	170	230	330			
		A	C	M	K	R	G	SPECIFY G	20.7±1.1	2.50	1.40
		8	35	55	70	100	120	175			



Contact Configuration :

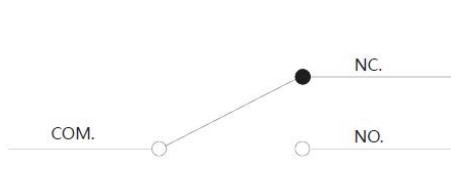

Solder terminal A TYPE



2-Ø3.1 mounting holes
or M3 screw holes

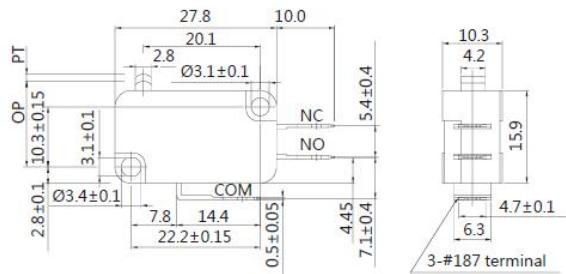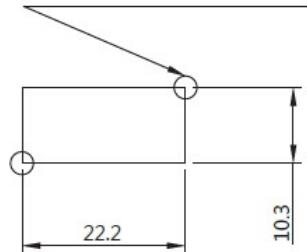

Specifications

Operating frequency (mechanical).....120 Operation / min

Operating frequency (electrical).....10~30 Operation / min

Contact resistance.....100m Ω (max)

Insulation resistance (at 500 VDC).....100MΩ(Min)

Service life(mechanical).....Min. 10,000,000 Operations

Service life(electrical)..... 10A-Min. 10,000 Operations

Operating force 110gf