

15EDGRC-3.5 15EDGRC-3.81

Material


Pin header : Brass, Tin plated
Housing : PA66, UL94V-0

Electrical


Rated voltage : 300V
Rated current : 8A
Contact resistance : 20mΩ
Insulation resistance : 5000MΩ/DC1000V
Withstanding voltage: AC2000V/1Min

Mechanical

Temp.Range : -40°C~+105°C

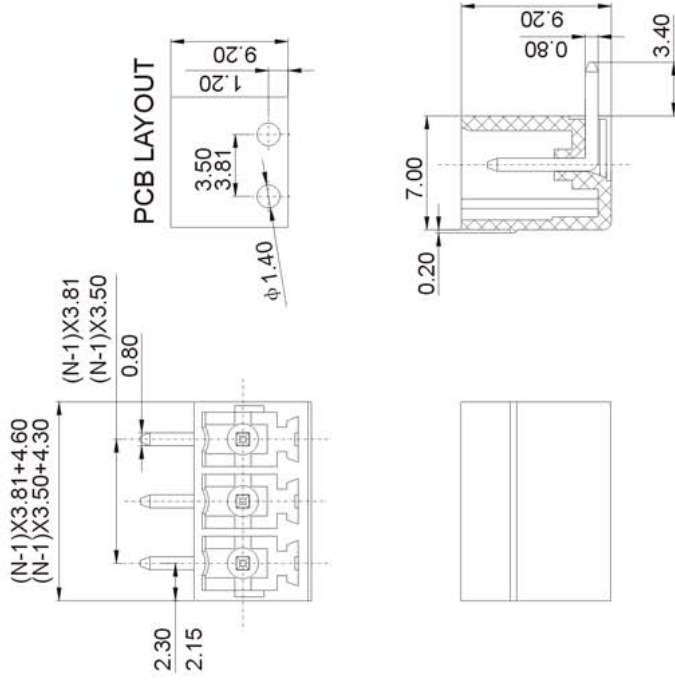


HOW TO ORDER:



1	Gray	4	Green	7	Trans- parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

Color

Series No. No of Pole



NAME

15EDGRC-3.5
15EDGRC-3.81