

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	TYF 06/04/05'		

- MATERIAL
CONTACT : PHOSPHOR BRONZE
SCREWS : M2.5 STEEL ZINC PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 16A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC1500V/1Min
WIRE RANGE : 28-12AWG 2.5mm²
- MECHANICAL
TEMP. RANGE : -40°C to +105°C
MAX SOLDERING : +250°C, FOR 5 SEC.
TORQUE : 0.5Nm(4.5lB.IN)
STRIP LENGTH : 7-8mm

PRODUCT NUMBER CODE:

KF2EDGKA - X X X X X



TABLE A

TYPE	Dimension A
1	5.00
2	5.08
3	7.50
4	7.62

- HOUSING COLOR
B:BLACK G:GREEN
- CONTACT PLATING
O:GOLD FLASH 6: TIN
- CONNECTOR TYPE
P:PLUG S:SOCKET
- No. OF CONTACTS
02 03 08 16
- SERIES No.



NX7.62-1.8
NX7.50-1.8
NX5.08
NX5.00

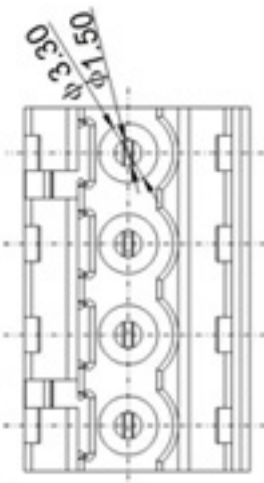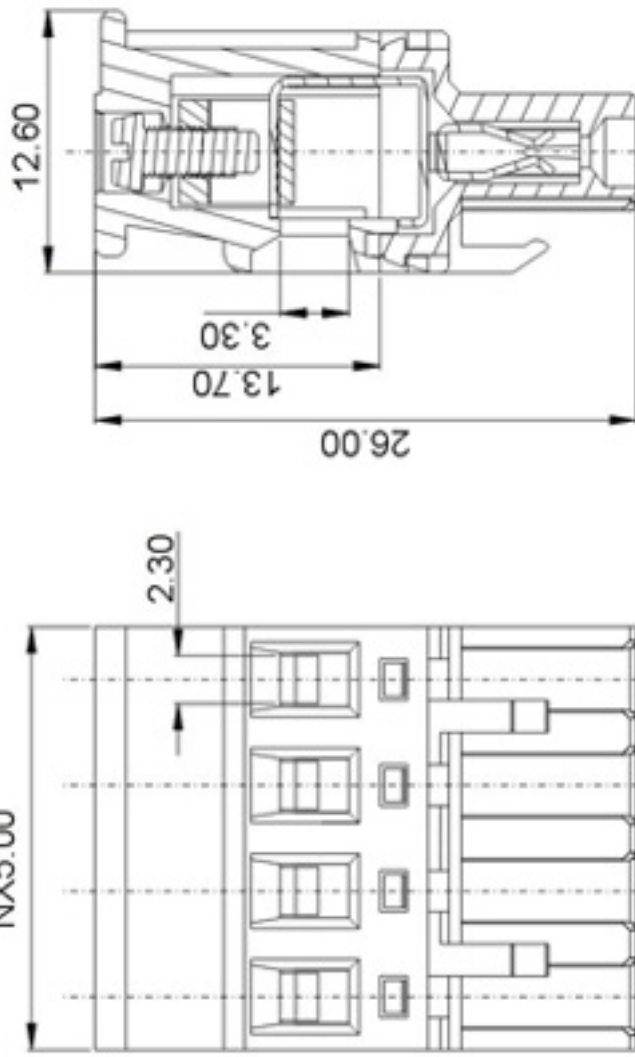

GENERAL TOLERANCE	ANGLE	TOLERANCE
X.	±5°	
.X	±3°	
.XX	±2°	

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1
	KF2EDGK-XXXX

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	KF2EDGK SERIES

PLUGGABLE TERMINAL BLOCKS
PITCH 5.00,5.08,7.5,7.62MM