


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	TYF 06/02/25'		




- MATERIAL
SCREWS : M2.5 STEEL ZINC PLATED
WIRE GUAR : PHOSPHOR BRONZE NI PLATED
HOUSING : PBT, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 10A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC2000V/1Min
WIRE RANGE : 28-16AWG 1.5mm²
- MECHANICAL
TEMP.RANGE : -40°C~+105°C
MAX SOLDERING : +250°C, FOR 5 SEC.
TORQUE : 0.4Nm(3.6IB.IN)
STRIP LENGTH : 4.5-5mm

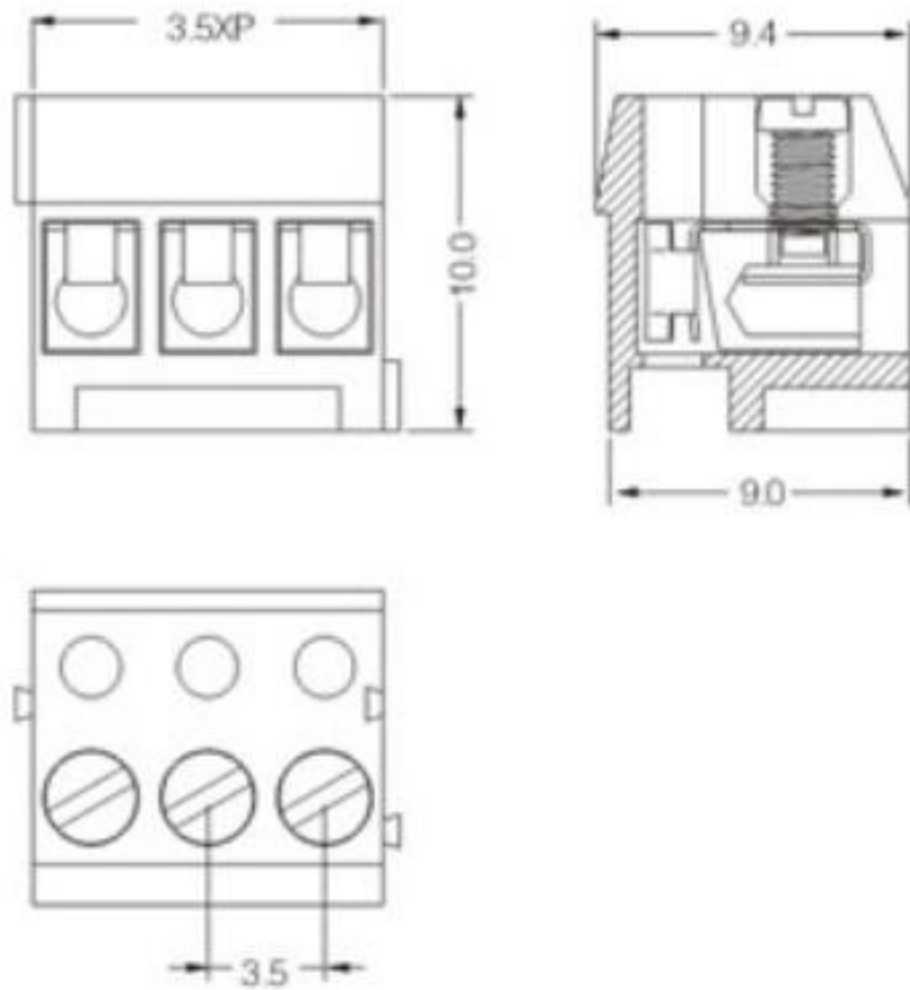

KF332-3.5

PRODUCT NUMBER CODE:

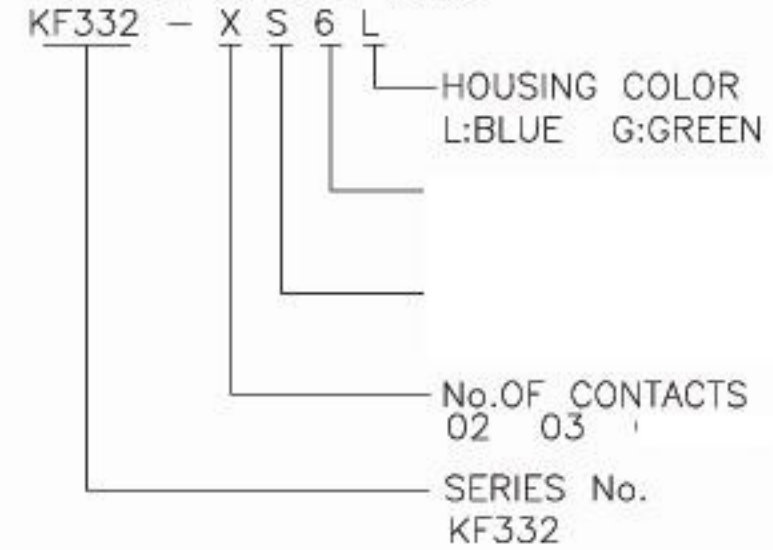

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE	EURO TERMINAL BLOCKS	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	KF332 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		KF332-XS6L						